



LIFTING GEAR UK
HIRE | SALES | SERVICE

HIRE CATALOGUE AND **PRODUCT GUIDE**





**LIFTING GEAR UK PROVIDES
EQUIPMENT FOR HIRE OR
PURCHASE TO BOTH UK AND
INTERNATIONAL MARKETS**

WELCOME TO LIFTING GEAR UK

At Lifting Gear UK, our focus each day is to provide a skilled and complete service you can trust.

Whether you're hiring or buying equipment, or require us to do the lifting for you, you can be assured of our 110% commitment to your satisfaction. Perhaps you're looking for repairs, servicing, load testing, training or even a bespoke piece of equipment to be made? Whatever you require, we will meet all your needs seamlessly and with complete professionalism.

With centres from London to Glasgow, Lifting Gear UK offers a full range of equipment with lifting capacities from 10 kg to 900 tonnes. We can call upon over 120 years of experience to advise, specify and supply the right lifting gear for you, including our comprehensive range of accessories.

Lifting Gear UK – we're here to take a load off your mind.





LIFTING PROJECTS UK
PLANNING | EQUIPMENT | PROJECT

TOTAL PROJECT MANAGEMENT

With load capacities up to several hundred tonnes,
Lifting Projects UK is ideally equipped to tackle any job.

CALL **01772 699888**

www.liftingprojects.com

OUR GROUP OF COMPANIES



LIFTING GEAR UK
GROUP

...improving the lifting world



LIFTING PROJECTS UK
PLANNING | EQUIPMENT | PROJECT

At Lifting Projects UK, we have the expertise to plan and complete your most challenging lifting projects. We're known for our meticulous attention to detail, highly skilled labour and ultra-professional project management.



STEELWISE
FABRICATION & ENGINEERING

Steelwise is our very own design and fabrication centre, so we can supply truly unique lifting solutions. If the equipment doesn't exist, we'll make it for you to all relevant international standards and painted in your company livery.



**LIFTING GEAR
TRAINING UK**

We offer a full range of training and familiarisation programmes with flexible delivery. You can attend courses at our Training Centre near Hinkley Point, in Bridgwater or at, or near, any Lifting Gear UK Centre. Bespoke courses to meet your specific needs can be held at your premises.



WHAT WE DO

HIRE

If you're looking to hire lifting equipment, you must be confident about its availability and condition. That's why we stock such an extensive, top quality range available for immediate hire and ready to be delivered to any location you choose. And, of course, all pre-inspected and fully serviced. As a result, repeat business from satisfied customers has become a key driver in the growth of our business. We listen to your needs and are happy to offer guidance to help you make the right choice. As a company we exist to find solutions and please our customers.

SALES

At Lifting Gear UK, you can also buy any of the hire equipment listed in our catalogue. All sales items are offered both nationally and internationally and many can be dispatched/delivered the next day. Customer assurance is our top priority, so every piece of equipment is supplied with a valid test certificate and meets or exceeds all necessary standards. It can also be marked with your own personal identification number to assist traceability in the future, should that be necessary.

REPAIR AND SERVICE

To minimise the time your equipment is out of commission, our trained technicians can carry out any servicing or repairs wherever you choose. Each item is provided with a detailed report of its thorough examination and can also be load tested if required. Most chain sling repairs can be done 'same day'. We repair all types of lifting equipment including chain blocks, lever hoists, cable pullers, clamps and trolleys and hydraulic cylinders.

LOLER INSPECTION

If you are using lifting equipment you must comply with the Lifting Operations and Lifting Equipment Regulations 1998 (LOLER) at all times. These require the equipment to be fit-for-purpose, suitably located, correctly installed and regularly checked by qualified inspectors. Our team can conduct statutory equipment examinations wherever you choose. They are qualified to do so through our comprehensive internal training schemes and LEEA (Lifting Equipment Engineers Association).

Following a satisfactory examination, you will be given the necessary reports to ensure you're operating within LOLER. You can access this information through Lifting Gear UK's unique online portal 'e-cert'.

PROOF LOAD TESTING

To ensure the on-going safety of your lifting gear, we will visit your site and conduct extensive load testing, up to 600 tonnes. We can provide immediate certification and reports, either on paper or digitally. Any equipment we repair and service can also be load tested, as required.

HEAVY LIFTING

Heavy Lifting is one of our specialties, whether we provide you with the lifting gear or undertake the project ourselves. Our equipment can lift up to 900 tonnes and is adapted for either onshore or offshore work. We also stock a wide range of modular, under, multi-point and single point beams plus wire and Dyneema slings, chains, shackles and grommets. Lifting Gear UK has over 70 years' experience of heavy lifting and we are happy to share our knowledge at on-site inspections to provide advice on planning and the best equipment and accessories to use.

CONTRACT LIFTING

Our Lifting Projects UK division delivers contract lifting projects from start to finish with unerring precision and efficiency. This includes the planning, method statement, labour, plant and equipment and total project management. We can also provide feasibility studies, risk assessments and CAD drawings, plus lift supervisors, slingers, banksmen and riggers who are CSCS/CPCS accredited. In addition, we will arrange all required project insurance for your peace of mind.

DESIGN AND FABRICATION

To ensure there are absolutely no limitations to our capacity to deliver unique, bespoke solutions, we have created our fabrication centre Steelwise where we can design and build your very own lifting equipment, to your exact specification, and proof load test it. Steelwise can also provide feasibility studies, technical drawings plus CE marking and other services to ensure your equipment meets international standards. And, because we own Steelwise, your order will get top priority with its progress monitored closely.

AUDITING AND CONSULTATION

Because we offer the total lifting solution, Lifting Gear UK also provides a full, independent auditing and consultation service. This can include reviews of site lifting plans and plant registers to ensure all are kept up to date and your legal obligations fully met.

We also review safe systems of working and can implement colour coding or date tagging schemes to promote safe practices in the workplace.





**LIFTING GEAR
TRAINING UK**

TAILORED TO YOUR NEEDS

We offer a full range of training and familiarisation programmes with flexible delivery, either based at LGUK or your premises.

CALL 0330 332 2650

www.lg-uk.com

11



SLINGS & LOOSE GEAR

23



LIFTING BEAMS

35



HOISTS, BLOCKS & WINCHES

47



CLAMPS & TROLLEYS

59



MATERIAL LIFTS, GANTRIES & FLOOR CRANES

75



SITE HOISTS & CONVEYORS

83



CRANE SITE EQUIPMENT

93



CONCRETE, STONE & MUCK HANDLING

115



FORKLIFT TRUCK ACCESSORIES

123



TRUCKS & TROLLEYS

141



JACKS & SKATES

157



TESTING & LOAD MEASUREMENT

163



HEIGHT & SAFETY EQUIPMENT

175



CRANE MATS & PLATES

183



ITEMISED INDEX PAGE



LIFTING GEAR UK
HIRE | SALES | SERVICE

LOLER INSPECTION

Thorough examination is a critical part of the lifting industry and we know how to do it to professional LOLER standards.

CALL **0330 332 2650**

www.lg-uk.com



SLINGS & LOOSE GEAR



CHAIN SLING SINGLE LEG, COLLAR CHAINS & PUMP CHAINS


Grade 8 and 10 chain slings are available in various lengths from 1m up to 10m as standard.

All fitted with shortening clutches and safety hooks.

Any size or S.W.L. available upon request.



| PRODUCT CODE | DESCRIPTION | S.W.L. | STANDARD LENGTH | AVAILABLE UP TO |
|--------------|-------------|--------|-----------------|-----------------|
| HCS1T1M1L | 1 Leg 7mm | 1.5t | 1m | 10m |
| HCS2T1M1L | 1 Leg 8mm | 2t | 1m | 10m |
| HCS3.15T1M1L | 1 Leg 10mm | 3.15t | 1m | 10m |
| HCS53T1M1L | 1 Leg 13mm | 5.3t | 1m | 10m |
| HCS8T1M1L | 1 Leg 16mm | 8t | 1m | 10m |
| HCS12T1M1L | 1 Leg 20mm | 12.5t | 3m | 10m |
| HCS15T1M1L | 1 Leg 22mm | 15t | 3m | 10m |
| HCS21.2T1M1L | 1 Leg 26mm | 21.2t | 3m | 10m |
| HCS31T1M1L | 1 Leg 32mm | 31.5t | 3m | 10m |



| Grade 8 | | | | | | | |
|---------------|------------|---------|---------|--------|------------------|--------|--|
| Chain Size mm | Single Leg | Endless | Two Leg | | Three & Four Leg | | |
| | | | 0-45° | 45-60° | 0-45° | 45-60° | |
| 7 | 1.5 | 2.5 | 2.1 | 1.5 | 3.1 | 2.2 | |
| 8 | 2.0 | 3.1 | 2.8 | 2.0 | 4.2 | 3.0 | |
| 10 | 3.15 | 5.0 | 4.25 | 3.15 | 6.7 | 4.75 | |
| 13 | 5.3 | 8.5 | 7.5 | 5.3 | 11.2 | 8.0 | |
| 16 | 8.0 | 12.5 | 11.2 | 8.0 | 17.0 | 11.8 | |
| 20 | 12.5 | 20.0 | 17.0 | 12.5 | 26.5 | 19.0 | |
| 22 | 15.0 | 23.6 | 21.2 | 15.0 | 31.5 | 22.4 | |
| 26 | 21.2 | 33.5 | 30.0 | 21.2 | 45.0 | 31.5 | |
| 32 | 31.5 | 50.0 | 45.0 | 31.5 | 67.0 | 47.5 | |
| Grade 10 | | | | | | | |
| Chain Size mm | Single Leg | Endless | Two Leg | | Three & Four Leg | | |
| | | | 0-45° | 45-60° | 0-45° | 45-60° | |
| 6 | 1.4 | 2.2 | 2.0 | 1.4 | 2.9 | 2.1 | |
| 8 | 2.5 | 4.0 | 3.5 | 2.5 | 5.3 | 3.8 | |
| 10 | 4.0 | 6.4 | 5.6 | 4.0 | 8.4 | 6.0 | |
| 13 | 6.7 | 10.8 | 9.5 | 6.7 | 14.0 | 10.0 | |
| 16 | 10.0 | 16.0 | 14.0 | 10.0 | 21.0 | 15.0 | |
| 20 | 16.0 | 25.6 | 22.4 | 16.0 | 33.6 | 24.0 | |
| 22 | 19.0 | 30.4 | 26.5 | 19.0 | 40.0 | 28.0 | |
| 26 | 26.5 | 42.4 | 37.1 | 26.5 | 55.7 | 39.8 | |
| 32 | 40.0 | 65.0 | 56.0 | 40.0 | 85.0 | 60.0 | |



OUR HIRE CHAINS
CAN TERMINATE IN ANY
OF THE FOLLOWING
HOOK TYPES



SLING HOOK



SELF-LOCKING HOOK



C HOOK

CHAIN SLING MULTI-LEG

Grade 8 and 10 chain slings available in various lengths from 3m up to 10m as standard.

All fitted with shortening clutches and safety hooks.

Any size or S.W.L. available upon request.

| PRODUCT CODE | DESCRIPTION | S.W.L. 0-45 DEG | STANDARD LENGTH | AVAILABLE UP TO |
|--------------|--------------------|--------------------|--------------------|--------------------|
| HCS2T3M2L | 2 Leg 7mm | 2.1t | 3m | 10m |
| HCS4T3M2L | 2 Leg 10mm | 4.25t | 3m | 10m |
| HCS5T3M2L | 2 Leg 10mm | 5.6t | 3m | 10m |
| HCS7T3M2L | 2 Leg 13mm | 7.5t | 3m | 10m |
| HCS9T3M2L | 2 Leg 13mm | 9.5t | 3m | 10m |
| HCS11T3M2L | 2 Leg 16mm | 11.2t | 3m | 10m |
| HCS14T3M2L | 2 Leg 16mm | 14t | 3m | 10m |
| HCS16T3M2L | 2 Leg 19mm | 17t | 3m | 10m |
| HCS20T3M2L | 2 Leg 19mm | 22.4t | 3m | 10m |
| HCS3T3M4L | 4 Leg 7mm | 3.1t | 3m | 10m |
| HCS6T3M4L | 4 Leg 10mm | 6.7t | 3m | 10m |
| HCS11T3M4L | 4 Leg 13mm | 11.2t | 3m | 10m |
| HCS17T3M4L | 4 Leg 16mm | 17t | 3m | 10m |
| HCS26T3M4L | 4 Leg 20mm | 26.5t | 3m | 10m |
| HWBC0.5T | Wheel Barrow Chain | 250kg | N/A | N/A |



SINGLE LEG



TWO LEG



QUAD LEG

DEE SHACKLES

An extensive range of Dee Shackles, kept in stock at all branches for hire or sale.



| PRODUCT CODE | DESCRIPTION | S.W.L. UP TO |
|--------------|--------------|--------------|
| HDS2T | Dee Shackles | 2t |
| HDS6T | Dee Shackles | 6t |
| HDS10T | Dee Shackles | 10t |
| HDS25T | Dee Shackles | 25t |
| HDS50T | Dee Shackles | 50t |
| HDS85T | Dee Shackles | 85t |
| HDS100T | Dee Shackles | 100t |
| HDS150T | Dee Shackles | 150t |
| HDS300T | Dee Shackles | 300t |




ALLOY BOW SHACKLES

**An extensive range of Alloy Bow Shackles,
kept in stock at all branches for hire or sale.**

Wide-bodied / sling saver and other shackle sizes are available.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|--------------------|--------|
| HABS3.25T | Alloy Bow Shackles | 3.25t |
| HABS4.75T | Alloy Bow Shackles | 4.75t |
| HABS9.5T | Alloy Bow Shackles | 9.5t |
| HABS25T | Alloy Bow Shackles | 25t |
| HABS50T | Alloy Bow Shackles | 50t |
| HABS85T | Alloy Bow Shackles | 85t |
| HABS100T | Alloy Bow Shackles | 100t |
| HABS150T | Alloy Bow Shackles | 150t |
| HABS300T | Alloy Bow Shackles | 300t |
| HABS400T | Alloy Bow Shackles | 400t |
| HABS500T | Alloy Bow Shackles | 500t |
| HABS600T | Alloy Bow Shackles | 600t |
| HABS800T | Alloy Bow Shackles | 800t |



QUICK RELEASE PILING SHACKLE

Quick release mechanism for easy pitching of piling sheets.



| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|------------------------------|--------|
| HPS2T | Quick Release Piling Shackle | 2t |
| HPS3T | Quick Release Piling Shackle | 3t |
| HPS5T | Quick Release Piling Shackle | 5t |

CONCRETE LIFTING CLUTCHES / EYES / RINGS

An extensive range of lifting eyes to help in the movement of pre-cast concrete.

FRIMEDA



- ▲ PERMITS LOADS IN ANY DIRECTION
- ▲ REMOTE AND HAND RELEASE OPTIONS
- ▲ HEAVY-DUTY STEEL ANCHORS

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|------------------|--------|
| HFR2.5T | Frimeda Clutches | 2.5t |
| HFR5T | Frimeda Clutches | 5t |
| HFR12T | Frimeda Clutches | 12t |
| HFR24T | Frimeda Clutches | 24t |
| HFR32T | Frimeda Clutches | 32t |

DEHA



- ▲ UNIVERSAL LINKS
- ▲ EASY INSTALLATION AND RELEASE
- ▲ SPHERICAL HEAD ANCHOR

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|---------------|--------|
| HCL1.3T | Deha Clutches | 1.3t |
| HCL2.5T | Deha Clutches | 2.5t |
| HCL5T | Deha Clutches | 5t |
| HCL10T | Deha Clutches | 10t |
| HCL20T | Deha Clutches | 20t |
| HCL32T | Deha Clutches | 32t |

WEBBING SLING

An extensive range of webbing slings, kept in stock at all branches for hire or sale.



S.W.L. UP TO 24 TONNES AVAILABLE



| PRODUCT CODE | DESCRIPTION | S.W.L. | STANDARD LENGTH |
|--------------|---------------|--------|-----------------|
| HWB1T3M | Webbing Sling | 1t | 3m |
| HWB2T3M | Webbing Sling | 2t | 3m |
| HWB3T3M | Webbing Sling | 3t | 3m |
| HWB5T3M | Webbing Sling | 5t | 3m |
| HWB10T3M | Webbing Sling | 10t | 3m |
| HWB15T3M | Webbing Sling | 15t | 3m |
| HWB20T3M | Webbing Sling | 20t | 3m |

Larger capacities / lengths are available.

ADVANTAGES

- ▲ HIGH STRENGTH TO WEIGHT RATIO
- ▲ COLOUR CODED FOR EASY CAPACITY RECOGNITION
- ▲ LIGHT AND FLEXIBLE
- ▲ ABILITY TO ABSORB SHOCK LOADS
- ▲ NO DAMAGE TO DELICATE AND PAINTED SURFACES
- ▲ WIDE LOAD BEARING AREA
- ▲ TWIST OR KINK RESISTANT
- ▲ UNAFFECTED BY GREASE AND OILS
- ▲ NO RISK OF INJURY TO OPERATOR
- ▲ LOW EXTENSION
- ▲ EASY TO INSPECT

| ROUNDSLING | | | | FLAT WEBBING SLING | | | | | |
|---|----------------|----------------|----------------|---|-----------|-------------|---------------------|---------------------|--------|
| Including colour coded range, woven stripe, showing safe working load. 1 Stripe = 1 tonne. Up to 8 UT. Manufactured to EN 1492-2 as applicable. | | | | Including colour coded range, soft eye and metal end fitting rings AL 1, AL 2, AL 3, AL 4, AL 5. Duplex. Manufactured to EN 1492-1 as applicable. | | | | | |
| Other sling types and lifting capacities are available on request: | | | | Vertical x 1 | Choke x 1 | O'Block x 2 | Spider 7'-45' x 14' | Spider 8'-50' x 11' | |
| ROUND SLING | SINGLE SLING | DOUBLE SLING | THREE SLING | LIFTING FACTOR | | | | | |
| | | | | LIFTING MODE | | | | | |
| Average (See 11-12) | Width (See 13) | Width (See 13) | Width (See 13) | COLOUR | Tonnes | Tonnes | Tonnes | Tonnes | Tonnes |
| ★ | 30 | ★ | | BLACK | 500kg | 400kg | 1.0 | 200kg | 500kg |
| 30 | 60 | 30&60 | | VIOLET | 1.0 | 800kg | 2.0 | 1.4 | 1.0 |
| ★ | 90 | ★ | | WHITE | 1.5 | 1.2 | 3.0 | 2.1 | 1.5 |
| 24 | 120 | 60 | | GREEN | 2.0 | 1.6 | 4.0 | 2.8 | 2.0 |
| 28 | 180 | 90 | | YELLOW | 3.0 | 2.4 | 6.0 | 4.2 | 3.0 |
| 32 | 240 | 120 | | GREY | 4.0 | 3.2 | 8.0 | 5.6 | 4.0 |
| 36 | 300 | 150 | | RED | 5.0 | 4.0 | 10.0 | 7.0 | 5.0 |
| 40 | 300 | 180 | | BROWN | 6.0 | 4.8 | 12.0 | 8.4 | 6.0 |
| 48 | ★ | 240 | | BLUE | 8.0 | 6.4 | 16.0 | 11.2 | 8.0 |
| 55 | ★ | 300 | | ORANGE | 10.0 | 8.0 | 20.0 | 14.0 | 10.0 |
| 59 | ★ | 300 | | ORANGE | 12.0 | 9.6 | 24.0 | 16.8 | 12.0 |
| 65 | ★ | 300 | | ORANGE | 15.0 | 12.0 | 30.0 | 21.0 | 15.0 |
| 76 | ★ | 300 | | ORANGE | 20.0 | 16.0 | 40.0 | 28.0 | 20.0 |
| 88 | ★ | 600 | | ORANGE | 25.0 | 20.0 | 50.0 | 35.0 | 25.0 |
| 100 | ★ | 600 | | ORANGE | 30.0 | 24.0 | 60.0 | 42.0 | 30.0 |
| 115 | ★ | 600 | | ORANGE | 40.0 | 32.0 | 80.0 | 56.0 | 40.0 |
| 130 | ★ | ★ | | ORANGE | 50.0 | 40.0 | 100.0 | 70.0 | 50.0 |

ROUND SLING

An extensive range of round slings, kept in stock at all branches for hire or sale.

S.W.L. UP TO 150 TONNES AVAILABLE

| PRODUCT CODE | DESCRIPTION | S.W.L. | STANDARD LENGTH (CIRCULAR) |
|--------------|-------------|--------|----------------------------|
| HRS1T4MC | Round Sling | 1t | 4m |
| HRS2T4MC | Round Sling | 2t | 4m |
| HRS3T4MC | Round Sling | 3t | 4m |
| HRS5T4MC | Round Sling | 5t | 4m |
| HRS10T4MC | Round Sling | 10t | 4m |
| HRS15T4MC | Round Sling | 15t | 4m |
| HRS20T4MC | Round Sling | 20t | 4m |

Larger capacities / lengths are available.



ADVANTAGES

- ▲ HIGH STRENGTH TO WEIGHT RATIO
- ▲ LIGHT AND FLEXIBLE
- ▲ ABILITY TO SHOCK ABSORB LOADS
- ▲ DOES NOT DAMAGE DELICATE AND PAINTED SURFACES
- ▲ FLATTENS UNDER LOAD
- ▲ TWIST OR KINK RESISTANT
- ▲ UNAFFECTED BY GREASE AND OILS
- ▲ NO RISK OF INJURY TO OPERATOR
- ▲ IDEAL FOR CHOKE APPLICATION
- ▲ LOW EXTENSION
- ▲ WEARS EVENLY ALONG THE LENGTH
- ▲ LOAD BEARING FIBRES PROTECTED FROM THE LOAD, GIVING GREATER RESISTANCE TO WEAR

WIRE ROPE SLINGS



An extensive range of wire rope slings, kept in stock at the branch for hire or sale.

Lifting Gear UK has access to the largest stock of heavy lifting wire ropes in the UK. Contact your local depot for further details.

LOAD EQUALISING BOBBINS ARE AVAILABLE FOR USE WITH WIRE ROPE SLINGS. THEY ALLOW LOADS TO SELF-LEVEL WHILE BEING LIFTED

| Working Load Limits Tonnes | | One Leg Sling | | Two Leg Sling | | | | Three and Four Leg Sling | | | | Endless Sling - Choke Hitch | |
|----------------------------|----------------|---------------|------------|---------------|------------|------------|------------|--------------------------|------------|------------|------------|-----------------------------|------------|
| Angle to the vertical | | 0° | | 0° - 45° | | >45° - 60° | | 0° - 45° | | >45° - 60° | | 0° | |
| | | | | | | | | | | | | | |
| Nominal Rope Diameter mm | Tensile n/ mm2 | Fibre Core | Steel Core | Fibre Core | Steel Core | Fibre Core | Steel Core | Fibre Core | Steel Core | Fibre Core | Steel Core | Fibre Core | Steel Core |
| 8 | 1960 | 0.76 | 0.82 | 1.06 | 1.15 | 0.76 | 0.82 | 1.6 | 1.72 | 1.14 | 1.23 | 1.22 | 1.31 |
| 9 | 1960 | 0.96 | 1.04 | 1.35 | 1.45 | 0.96 | 1.04 | 2.02 | 2.18 | 1.44 | 1.56 | 1.54 | 1.66 |
| 10 | 1960 | 1.19 | 1.28 | 1.66 | 1.79 | 1.19 | 1.28 | 2.49 | 2.69 | 1.78 | 1.92 | 1.9 | 2.05 |
| 11 | 1960 | 1.44 | 1.55 | 2.01 | 2.17 | 1.44 | 1.55 | 3.02 | 3.25 | 2.16 | 2.32 | 2.3 | 2.48 |
| 12 | 1960 | 1.71 | 1.84 | 2.39 | 2.57 | 1.71 | 1.84 | 3.59 | 3.85 | 2.56 | 2.75 | 2.73 | 2.94 |
| 13 | 1960 | 2 | 2.17 | 2.8 | 3.03 | 2 | 2.17 | 4.2 | 4.55 | 3 | 3.25 | 3.2 | 3.47 |
| 14 | 1960 | 2.33 | 2.51 | 3.26 | 3.52 | 2.33 | 2.51 | 4.9 | 5.28 | 3.5 | 3.77 | 3.73 | 4.02 |
| 16 | 1960 | 3.05 | 3.29 | 4.27 | 4.6 | 3.05 | 3.29 | 6.4 | 6.9 | 4.57 | 4.93 | 4.88 | 5.26 |
| 18 | 1960 | 3.85 | 4.15 | 5.4 | 5.81 | 3.85 | 4.15 | 8.09 | 8.71 | 5.78 | 6.22 | 6.17 | 6.64 |
| 20 | 1960 | 4.75 | 5.12 | 6.66 | 7.17 | 4.75 | 5.12 | 9.98 | 10.75 | 7.13 | 7.68 | 7.61 | 8.19 |
| 22 | 1960 | 5.75 | 6.2 | 8.04 | 8.69 | 5.75 | 6.2 | 12.06 | 13.03 | 8.62 | 9.31 | 9.19 | 9.93 |
| 24 | 1960 | 6.85 | 7.38 | 9.58 | 10.33 | 6.85 | 7.38 | 14.38 | 15.5 | 10.27 | 11.07 | 10.95 | 11.81 |
| 26 | 1960 | 8.02 | 8.66 | 11.23 | 12.13 | 8.02 | 8.66 | 16.84 | 18.19 | 12.03 | 13 | 12.83 | 13.86 |
| 28 | 1960 | 9.31 | 10.04 | 13.03 | 14.06 | 9.31 | 10.04 | 19.54 | 21.08 | 13.96 | 15.06 | 14.89 | 16.06 |
| 32 | 1960 | 12.15 | 13.12 | 17.01 | 18.37 | 12.15 | 13.12 | 25.52 | 27.56 | 18.23 | 19.69 | 19.44 | 21 |
| 36 | 1960 | 15.38 | 16.59 | 21.53 | 23.23 | 15.38 | 16.59 | 32.3 | 34.84 | 23.07 | 24.89 | 24.61 | 26.55 |
| 40 | 1770 | 19.09 | 20.56 | 26.72 | 28.78 | 19.09 | 20.56 | 40.09 | 43.17 | 28.63 | 30.84 | 30.54 | 32.89 |
| 44 | 1770 | 22.94 | 24.78 | 32.12 | 34.69 | 22.94 | 24.78 | 48.18 | 52.04 | 34.42 | 37.17 | 36.71 | 39.65 |
| 48 | 1770 | 27.35 | 29.55 | 38.29 | 41.37 | 27.35 | 29.55 | 57.43 | 62.06 | 41.02 | 44.33 | 43.76 | 47.28 |
| 52 | 1770 | 32.12 | 34.69 | 44.97 | 48.57 | 32.12 | 34.69 | 67.45 | 72.85 | 48.18 | 52.04 | 51.39 | 55.51 |
| 56 | 1770 | 37.26 | 40.2 | 52.16 | 56.28 | 37.26 | 40.2 | 78.25 | 84.41 | 55.89 | 60.3 | 59.62 | 64.32 |
| 60 | 1770 | 42.77 | 46.07 | 59.87 | 64.5 | 42.77 | 46.07 | 89.81 | 96.75 | 64.15 | 69.11 | 68.43 | 73.71 |
| Leg Factor | | 1 | | 1.4 | | 1 | | 2.1 | | 1.5 | | 1.6 | |

Larger capacities / lengths are available.



WIRE ROPE GROMMETS ARE ALSO AVAILABLE

DYNEEMA SLINGS

When it comes to heavy lifting, these ropes can suit a variety of different purposes.

For example, they can hold machine parts lifted up to wind turbines offshore, as well as the lifting of turbines for hydraulic power stations and raising derailed trains into position. These ropes are around 10 times stronger than steel wires per unit of weight. This means they possess more strength than a steel wire of the same diameter, but are less than one-tenth the weight.



| PRODUCT CODE | DESCRIPTION | S.W.L. | E.W.L. |
|--------------|---------------|--------|--------|
| HD200T14MC | Dyneema Sling | 200t | 7m |
| HD200T20MC | Dyneema Sling | 200t | 10m |
| HD200T24MC | Dyneema Sling | 200t | 12m |
| HD200T28MC | Dyneema Sling | 200t | 14m |
| HD200T100MC | Dyneema Sling | 200t | 50m |
| HD250T14MC | Dyneema Sling | 250t | 7m |
| HD300T10MC | Dyneema Sling | 300t | 5m |
| HD300T26MC | Dyneema Sling | 300t | 13m |
| HD300T52MC | Dyneema Sling | 300t | 26m |
| HD450T32MC | Dyneema Sling | 450t | 16m |
| HD600T44MC | Dyneema Sling | 600t | 22m |

STEEL WIRE ROPE SLINGS v DYNEEMA SLINGS



| STEEL WIRE ROPE SLING | DYNEEMA SLING |
|---|--|
| Steel are ten times heavier per capacity ratio | Lighter, safer and faster handling |
| Steel wire ropes are very stiff and hard to manoeuvre | Easier to bend and manoeuvre onto shackles etc. |
| Steel wire ropes retain bends | Do not retain kinks or bends |
| Steel wire ropes require larger transport due to extra weight | Lower transport cost due to lower weights |
| Steel wire ropes may require a larger crane due to extra weight | Possible down size in the actual crane used to carry out the lift |
| Steel wire ropes can have sharp strands of wire sticking out | No sharp edges due to the soft material they are manufactured from |
| Steel wire ropes have ferrules that can snag | Have no jointing Ferrules to snag |
| Steel wire ropes have higher download factors | Lower download factor |
| Steel wire ropes 300 tonne capacity 100kg per meter | 300 tonne capacity Dyneema 9.09kg per metre |

LIFTING BEAMS



MODULAR SPREADER BEAM

We have a range of Modular Spreader Beams from 10 tonne up to 900 tonne, supplied in lengths from 1m up to 26m.

Our Modular Spreader Beams consists of two end units encompassing drop links and appropriate capacity shackles. Different length inserts are used between the ends to achieve the required spans ranging from increments of 0.25m.

The beams bolt together on site for easy transportation.

| DESCRIPTION | S.W.L. | STANDARD LENGTH |
|-----------------------|--------|-----------------|
| Modular Spreader Beam | 10t | 1m - 9m |
| Modular Spreader Beam | 24t | 1m - 7.5m |
| Modular Spreader Beam | 30t | 1m - 12m |
| Modular Spreader Beam | 50t | 1.5m - 12m |
| Modular Spreader Beam | 100t | 1m -12m |
| Modular Spreader Beam | 130t | 2m - 26m |
| Modular Spreader Beam | 260t | 2m - 18m |
| Modular Spreader Beam | 400t | 2m - 23m |
| Modular Spreader Beam | 600t | 2m - 26m |
| Modular Spreader Beam | 900t | 2m - 22m |



LIFTING GEAR UK HAS THE LARGEST RANGE OF HEAVY LIFTING ACCESSORIES IN THE UK FOR HIRE. PLEASE SEE THE HEAVY LIFTING GEAR SECTION AT THE FRONT OF THE CATALOGUE FOR MORE DETAILS

ROOF SHEET / PANEL LIFTING BEAM

Our Roof Sheet Beams are a light-weight modular spreader beam suitable for long, light loads and has been specially developed to suit roofing sheets.

Maximum spans from 6m up to 42m in 3m increments are achievable using this system. Lower support slings can be attached to the frames every 2m to ensure a uniformly distributed load.

| PRODUCT CODE | DESCRIPTION | S.W.L. | STANDARD LENGTH |
|--------------|---------------------------------|--------|-----------------|
| HRSB3T6M | Roof Sheet / Panel Lifting Beam | 3t | 6m |
| HRSB3T12M | Roof Sheet / Panel Lifting Beam | 3t | 12m |
| HRSB3T18M | Roof Sheet / Panel Lifting Beam | 3t | 18m |
| HRSB3T24M | Roof Sheet / Panel Lifting Beam | 3t | 24m |
| HRSB3T33M | Roof Sheet / Panel Lifting Beam | 2t | 33m |
| HRSB3T42M | Roof Sheet / Panel Lifting Beam | 1t | 42m |

DON'T FORGET TO BOOK
YOUR SHACKLES AND
WEBBING SLINGS TO BE
USED WITH YOUR BEAM



CRUCIFORM LIFTING BEAM

The Cruciform Lifting Beam is designed to lift and transport big bags safely and securely.

It is manufactured as a 4 point fixed frame of welded construction incorporating 4 hooks and safety latches which allow fast loading and unloading.

Various dimensions are available.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|------------------------|--------|
| HCFB | Cruciform Lifting Beam | 2t |



ADJUSTABLE SINGLE POINT LIFTING BEAM

Adjustable Beams have a fixed point on top and moveable drop links on the underside.

They are ideal for situations where loads of varying physical sizes need lifting or where lifting points are unusual distances apart.

| PRODUCT CODE | DESCRIPTION | S.W.L. | LENGTH |
|--------------|--------------------------------------|--------|-------------|
| HALB5T4M | Adjustable Single Point Lifting Beam | 5t | 2m - 4m |
| HALB10T2.5 | Adjustable Single Point Lifting Beam | 10t | 0.7m - 2.5m |



LIFTING CENTRES CAN BE ADJUSTED TO ANY LENGTH

MULTIPOINT LIFTING BEAM

Multipoint Lifting Beams have lifting points at various intervals along the bottom.

They are ideal for lifting fragile but heavy items that require lifting on several points.

Other multipoint beams are available.



| PRODUCT CODE | DESCRIPTION | S.W.L. | LENGTH |
|--------------|-------------------------|--------|--------|
| HMPB7T2.7M | Multipoint Lifting Beam | 7t | 2m |
| HMPB8T4M | Multipoint Lifting Beam | 8t | 4m |
| HMPB8T7M | Multipoint Lifting Beam | 8t | 7m |
| HMPB9T2.5M | Multipoint Lifting Beam | 9t | 2.5m |
| HMPB9T3.5M | Multipoint Lifting Beam | 9t | 3.5m |
| HMPB8T8M | Multipoint Lifting Beam | 8t | 8m |
| HMPB10T4M | Multipoint Lifting Beam | 10t | 4m |
| HMPB10T8M | Multipoint Lifting Beam | 10t | 8m |
| HMPB26T6M | Multipoint Lifting Beam | 26t | 6m |
| HMPB27T6M | Multipoint Lifting Beam | 27t | 6m |
| HMPB33T6M | Multipoint Lifting Beam | 32t | 5.7m |
| HMPB33T6M | Multipoint Lifting Beam | 33t | 6m |
| HMPB36T7.5M | Multipoint Lifting Beam | 36t | 7.5m |
| HMPB40T5.5M | Multipoint Lifting Beam | 40t | 5.5m |
| HMPB90T9.05M | Multipoint Lifting Beam | 90t | 9.05m |

FIXED SINGLE POINT LIFTING BEAM



- ▲ SINGLE CENTRAL TOP LIFTING POINT
- ▲ TWO FIXED POINTS ON THE BOTTOM
- ▲ REQUIRED FOR LIFTS WITH LOW HEADROOM

Other lengths are available.

| PRODUCT CODE | DESCRIPTION | S.W.L. | LENGTH |
|--------------|---------------------------------|--------|--------|
| HSPLB1.5T2M | Fixed Single Point Lifting Beam | 1.5t | 2m |
| HSPLB3T1M | Fixed Single Point Lifting Beam | 3t | 1m |
| HSPLB4T1.5M | Fixed Single Point Lifting Beam | 4t | 1.5m |
| HSPLB6T1.8M | Fixed Single Point Lifting Beam | 6t | 1.8m |
| HSPLB6T2.5M | Fixed Single Point Lifting Beam | 6t | 2.5m |
| HSPLB10T2M | Fixed Single Point Lifting Beam | 10t | 2m |
| HSPLB10T6M | Fixed Single Point Lifting Beam | 10t | 6m |
| HSPLB10T7.5M | Fixed Single Point Lifting Beam | 10t | 7.5m |
| HSPLB12T3.5M | Fixed Single Point Lifting Beam | 12t | 3.5m |
| HSPLB16T1.8M | Fixed Single Point Lifting Beam | 16t | 1.8m |
| HSPLB16T3M | Fixed Single Point Lifting Beam | 16t | 3m |
| HSPLB20T6M | Fixed Single Point Lifting Beam | 20t | 6m |
| HSPLB25T2.5M | Fixed Single Point Lifting Beam | 25t | 2.5m |
| HSPLB25T3M | Fixed Single Point Lifting Beam | 25t | 3m |
| HSPLB33T6M | Fixed Single Point Lifting Beam | 33t | 6m |

LIFTING UNDER BEAMS

Under beams are used to cradle loads to allow safe and easy lifting of items such as pre-cast bridge sections.

Both heavy and lightweight versions are available in varying lengths for lifting anything from caravans to bridge sections.

Capacities available up to 196 tonnes.

PLEASE CALL TO DISCUSS YOUR REQUIREMENTS AND TO GET A QUOTE



| PRODUCT CODE | DESCRIPTION | S.W.L. | LENGTH |
|--------------|--------------------|--------|--------|
| HLUB1T1.5M | Lifting Under Beam | 1t | 1.5m |
| HLUB16T4.4M | Lifting Under Beam | 16t | 4.4m |
| HLUB16T6.2M | Lifting Under Beam | 16t | 6.2m |
| HLUB32T6M | Lifting Under Beam | 32t | 6m |
| HLUB196T3.5M | Lifting Under Beam | 196t | 3.5m |
| HLUB196T12M | Lifting Under Beam | 196t | 12m |


GOT AN UNUSUAL LIFT AND STRUGGLING TO FIND THE GEAR TO DO THE JOB?
LIFTING GEAR UK CAN CARRY OUT A FREE SITE INSPECTION AND HELP YOU PLAN YOUR JOB!

COUNTERBALANCE LIFTING BEAMS

Ideal solution where an offset beam is required, the beam is designed to have offset weight to match the payload.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|---------------------------------|--------|
| HCBLB5T | Counterbalance Lifting Beam 8m | 5t |
| HCBLB6T | Counterbalance Lifting Beam 6m | 6t |
| HCBLB11T | Counterbalance Lifting Beam 10m | 11t |

- VARIOUS OFFSET LENGTHS AVAILABLE FROM 3M TO 5M
- SUPPLIED WITH SLINGS, WEIGHTS AND ACCESSORIES

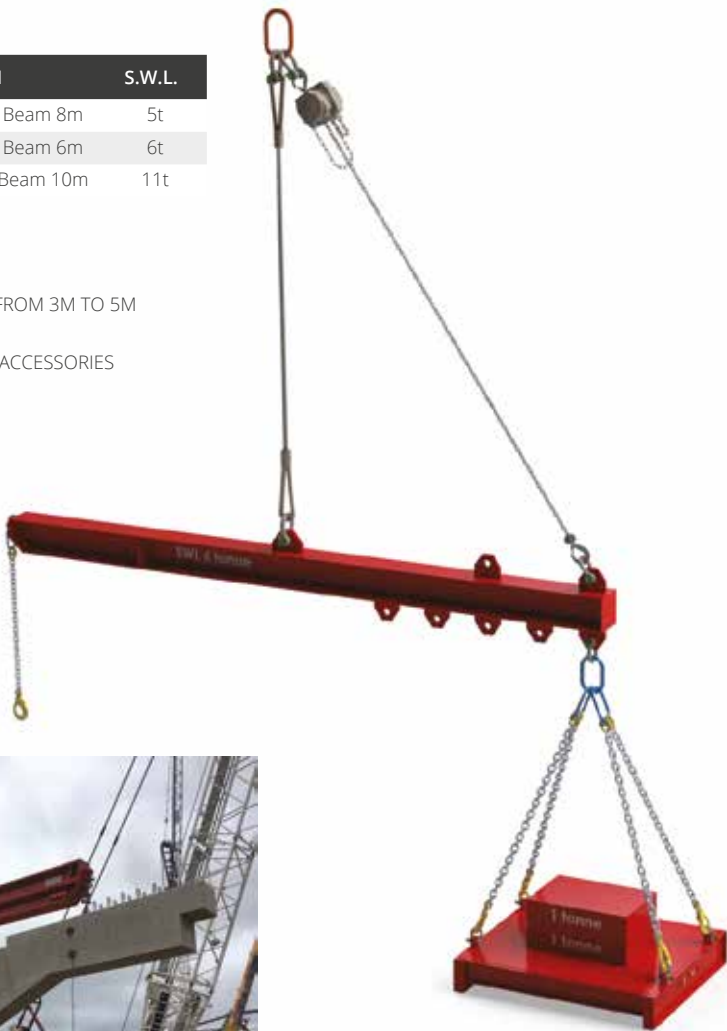

MODULAR LIFTING FRAME

The ideal solution for a 4 point lift where there is a low headroom requirement or where a “H” Type modular beam arrangement cannot be utilised.

- MODULAR 20-TONNE FRAME HAS AN ASSEMBLY SIZE RANGING FROM 1M X 1M UP TO 6M X 6M IN 0.25M INCREMENTS. FRAME INSERTS COME IN LENGTHS OF 0.25M, 0.5M, 1M, 2M AND 3M
- MODULAR 48-TONNE FRAME HAS AN ASSEMBLY SIZE RANGING FROM 1M X 1M UP TO 7M X 7M IN 0.25M INCREMENTS. FRAME INSERTS COME IN LENGTHS OF 0.25M, 0.5M, 1M, 2M AND 3M
- EASY TO DISMANTLE INTO SECTIONS FOR TRANSPORTATION
- SUPPLIED COMPLETE WITH DROP LINKS AND SHACKLES AS STANDARD

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-------------------------------|--------|
| MODF20 | Modular Lifting Frame 6m x 6m | 20t |
| MODF48 | Modular Lifting Frame 7m x 7m | 48t |



Max. number of struts allowed in spreader assembly is 5 which are fixed with 4 bolts per joint. Longest section inserts to be installed in the middle of the beam with progressively shorter sections installed at the ends of the beam to achieve the desired lengths.

CONTAINER LIFTING FRAME

The Container Lifting frame is designed to lift ISO containers vertically, supplied with top wire rope assembly and shackles to suit.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-----------------------------------|--------|
| HCLF35T | Container Lifting Frame 6m x 2.5m | 35t |



MACHINE LIFTING TRAYS

This tray is ideal for lifting any self-propelled plant / vehicle that doesn't have any lifting points.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-----------------------------------|--------|
| HLT30T | Machine Lifting Tray 4.5m x 2.9m | 30t |
| HLT40T | Machine Lifting Tray 6.22m x 3.8m | 40t |
| HLT50T | Machine Lifting Tray 7.2m x 2.75m | 50t |
| HLT50T | Machine Lifting Tray 7.2m x 3.8m | 50t |

- VARIOUS ADJUSTABLE MODELS AVAILABLE
- STRONG HEAVY DUTY BUILD
- SUPPLIED WITH SLINGS AND MOD BEAMS TO SUIT
- THE MOD BEAM FRAME CAN BE UTILISED IF A LOWER HEAD ROOM IS REQUIRED



Locking pin detail - to remove the pin, rotate it until the flat edge is facing upwards and pull the pin fully out.

HOISTS, BLOCKS & WINCHES



360° MANUAL CHAINHOISTS

IDEAL FOR SAFER WORKING!

A hand chain hoist which opens up huge new opportunities: The Yalelift 360° MK III opens up a new world of safety for the operator.

The range of applications as well as the operating conditions has been changed by a revolutionary hand chain design. The revolutionary 360° rotating hand chain guide is the key to this innovation, which allows operation of the hand chain from virtually any position, even in extremely confined areas.

Longer heights of lift available.

| PRODUCT CODE | DESCRIPTION | S.W.L. | H.O.L. |
|--------------|------------------------|--------|--------|
| HCB0.5T3M3 | 360° Manual Chainhoist | 0.5t | 3m |
| HCB1T3M3 | 360° Manual Chainhoist | 1t | 3m |
| HCB2T3M3 | 360° Manual Chainhoist | 2t | 3m |
| HCB3T3M3 | 360° Manual Chainhoist | 3t | 3m |
| HCB5T3M3 | 360° Manual Chainhoist | 5t | 3m |
| HCB10T3M3 | 360° Manual Chainhoist | 10t | 3m |
| HCB20T3M3 | 360° Manual Chainhoist | 20t | 3m |

- ▲ The Yalelift 360 MK III can be operated at the side of the load or from any other position including horizontal pulling. The plane between top and bottom hook must always be in a straight line and duration of the WLL will apply.
- ▲ More flexibility gives greater safety – operators can now work outside of the immediate danger zone reducing the risk of operator injury.
- ▲ Safety under control: By means of the 360° rotating hand chain guide, the user can operate the hoist from all directions and is no longer directly within the danger zone as before.
- ▲ Work from above: The flexibility of the Yalelift 360 MK III allows the operator to work from directly above the load. The advantage of this application is you can have a long lift whilst using a relatively short hand chain. The revolutionary chain guide ensures a precise and smooth chain operation at all times





MANUAL CHAINBLOCKS

Designed for easy raising and lowering of equipment in a controlled manner.

The perfect tool for many situations, from construction to engineering work.



| PRODUCT CODE | DESCRIPTION | S.W.L. | H.O.L. |
|-----------------------|-------------------|--------|--------|
| HCB0.5T3M | Manual Chainblock | 500kg | 3m |
| HCB0.5T6M | Manual Chainblock | 500kg | 6m |
| HCB0.5T9M | Manual Chainblock | 500kg | 9m |
| HCB0.5T15M | Manual Chainblock | 500kg | 15m |
| HCB0.5T30M | Manual Chainblock | 500kg | 30m |
| MORE H.O.L. AVAILABLE | | | |
| HCB1T3M | Manual Chainblock | 1t | 3m |
| HCB1T6M | Manual Chainblock | 1t | 6m |
| HCB1T9M | Manual Chainblock | 1t | 9m |
| HCB1T15M | Manual Chainblock | 1t | 15m |
| HCB1T30M | Manual Chainblock | 1t | 30m |
| MORE H.O.L. AVAILABLE | | | |
| HCB2T3M | Manual Chainblock | 2t | 3m |
| HCB2T6M | Manual Chainblock | 2t | 6m |
| HCB2T9M | Manual Chainblock | 2t | 9m |
| HCB2T15M | Manual Chainblock | 2t | 15m |
| HCB2T30M | Manual Chainblock | 2t | 30m |
| MORE H.O.L. AVAILABLE | | | |
| HCB3T3M | Manual Chainblock | 3t | 3m |
| HCB3T6M | Manual Chainblock | 3t | 6m |
| HCB3T9M | Manual Chainblock | 3t | 9m |
| HCB3T15M | Manual Chainblock | 3t | 15m |
| MORE H.O.L. AVAILABLE | | | |
| HCB5T3M | Manual Chainblock | 5t | 3m |
| HCB5T6M | Manual Chainblock | 5t | 6m |
| HCB5T9M | Manual Chainblock | 5t | 9m |
| HCB5T15M | Manual Chainblock | 5t | 15m |
| MORE H.O.L. AVAILABLE | | | |
| HCB10T3M | Manual Chainblock | 10t | 3m |
| HCB10T6M | Manual Chainblock | 10t | 6m |
| HCB10T9M | Manual Chainblock | 10t | 9m |
| HCB10T15M | Manual Chainblock | 10t | 15m |
| HCB15T6M | Manual Chainblock | 15t | 6m |
| HCB20T6M | Manual Chainblock | 20t | 6m |
| HCB30T6M | Manual Chainblock | 30t | 6m |

ELECTRIC CHAINHOIST

The Electric Chain Hoist comes in a range of 110v, 240v and 415v.

All hoists have a range of lift chain heights and pendant control.



| PRODUCT CODE | S.W.L. | H.O.L. |
|-----------------------|--------|--------|
| HECB5006M | 500kg | 6m |
| HECB50012M | 500kg | 12m |
| HECB50015M | 500kg | 15m |
| HECB50025M | 500kg | 25m |
| MORE H.O.L. AVAILABLE | | |
| HECB1T6M | 1t | 6m |
| HECB1T12M | 1t | 12m |
| HECB1T15M | 1t | 15m |
| HECB1T25M | 1t | 25m |
| MORE H.O.L. AVAILABLE | | |
| HECB2T6M | 2t | 6m |
| HECB2T12M | 2t | 12m |
| HECB2T15M | 2t | 15m |
| HECB2T25M | 2t | 25m |
| MORE H.O.L. AVAILABLE | | |
| HECB3T6M | 3t | 6m |
| HECB3T12M | 3t | 12m |
| HECB3T15M | 3t | 15m |
| HECB3T25M | 3t | 25m |
| MORE H.O.L. AVAILABLE | | |
| HECB5T6M | 5t | 6m |
| HECB10T6M | 10t | 6m |

Tough lightweight aluminium alloy covers totally enclose the mechanical and electrical components providing protection and efficient heat dissipation.

The design enables easy access for installation and service.


- ▲ ADJUSTABLE UPPER AND LOWER LIMIT SWITCHES
- ▲ EXCELLENT CLOSED HEIGHT DIMENSIONS
- ▲ LOAD HOOK WITH AXIAL BEARING
- ▲ IDEAL FOR LONG HEIGHTS OF LIFT
- ▲ MODELS MAY VARY

AIR HOIST

Pneumatic hoists are ideal for the petrochemical industry and hazardous working environments.

They are fitted with a pull cord control for easy operation.

Air hoists are available up to 75 tonnes.

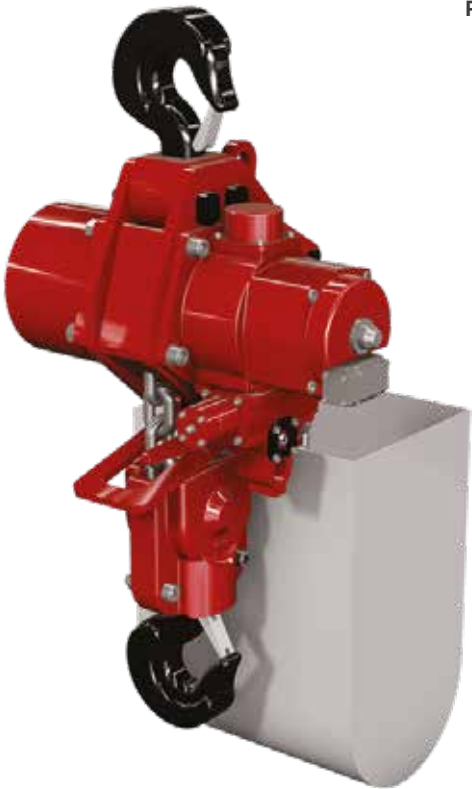

| PRODUCT CODE | S.W.L. | H.O.L. |
|-----------------------|--------|--------|
| HAH1T6M | 1t | 6m |
| HAH1T12M | 1t | 12m |
| HAH1T18M | 1t | 18m |
| MORE H.O.L. AVAILABLE | | |
| HAH3T6M | 3t | 6m |
| HAH3T12M | 3t | 12m |
| HAH3T18M | 3t | 18m |
| MORE H.O.L. AVAILABLE | | |
| HAH6T6M | 6t | 6m |
| HAH6T12M | 6t | 12m |
| HAH6T18M | 6t | 18m |
| MORE H.O.L. AVAILABLE | | |
| HAH12T6M | 12t | 6m |
| HAH15T6M | 15t | 6m |
| HAH20T6M | 20t | 6m |
| HAH25T6M | 25t | 6m |
| HAH50T6M | 50t | 6m |

- ▲ SUITABLE FOR APPLICATION IN HAZARDOUS AREAS (EXPLOSION PROTECTION)
- ▲ SENSITIVE INFINITELY VARIABLE SPEED CONTROL FOR THE PRECISE POSITIONING OF LOADS
- ▲ EASY OPERATION
- ▲ SUITABLE FOR LUBE-FREE OPERATION
- ▲ FREQUENT SWITCHING AND EXTENDED DUTY CYCLES
- ▲ LOW MAINTENANCE
- ▲ LOW HEADROOM, LIGHTWEIGHT
- ▲ SOUND ABSORPTION


LEVER HOIST / PULL LIFT

When pulling or lifting, the lever hoist can be used in any configuration.

Designed for use in confined working areas. Standard chain lengths 1.5m, other lengths available on request.



| PRODUCT CODE | S.W.L. | H.O.L. |
|--------------|--------|--------|
| HLVH0.25T | 250kg | 1.5m |
| HLVH0.8T | 800kg | 1.5m |
| HLVH1.6T | 1.6t | 1.5m |
| HLVH3T | 3t | 1.5m |
| HLVH6T | 6t | 1.5m |
| HLVH9T | 9t | 1.5m |

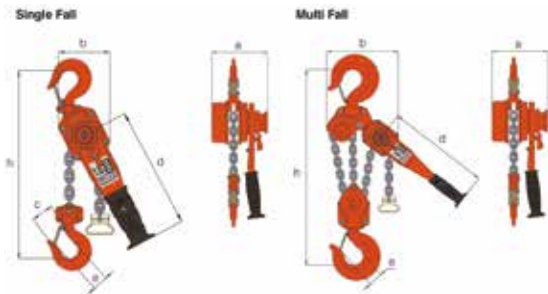

| WLL tonnes | No. of Falls | Load Chain mm | Standard Lift (m) | a mm | b mm | c mm | d mm | e mm | h mm | Mass kg | Extra Weight per M kg |
|------------|--------------|---------------|-------------------|-------|------|------|------|------|------|---------|-----------------------|
| 0.80 | 1 | 5.6 x 17 | 1.5 | 148.0 | 121 | 37.5 | 265 | 28 | 280 | 6.20 | 0.70 |
| 1.60 | 1 | 7.1 x 21 | 1.5 | 165.5 | 141 | 47.0 | 415 | 33 | 350 | 9.60 | 1.10 |
| 3.20 | 1 | 10 x 30 | 1.5 | 194.5 | 178 | 62.5 | 415 | 42.5 | 420 | 15.50 | 2.20 |
| 6.30 | 2 | 10 x 30 | 1.5 | 194.5 | 228 | 78.0 | 415 | 51 | 570 | 27.00 | 4.40 |
| 9.00 | 3 | 10 x 30 | 1.5 | 194.5 | 310 | - | 415 | 56 | 680 | 38.30 | 6.60 |
| 15.00 | 6 | 10 x 30 | 1.5 | 194.5 | 420 | - | 415 | 60 | 1000 | 60.00 | 13.20 |
| 20.00 | 6 | 10 x 30 | 1.5 | 194.5 | 480 | - | 415 | 60 | 1150 | 105.00 | 19.20 |

LIFTING / PULLING MACHINE



Lifting / pulling machines can be utilised for winching, hoisting and tensioning various applications.

The pulling power can be increased using various sheaving applications.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-------------|--------|
| HTU8 | TU8 | 0.8t |
| HTU16 | TU16 | 1.6t |
| HTU32 | TU32 | 3.2t |

| PRODUCT CODE | ROPE LENGTH |
|--------------|-------------|
| HTR10M | 10m |
| HTR20M | 20m |
| HTR30M | 30m |
| HTR40M | 40m |
| HTR50M | 50m |
| HTR60M | 60m |
| HTR70M | 70m |
| HTR80M | 80m |



HYDRAULIC POWERED LIFTING / PULLING MACHINE

Lifting / pulling winches can be used singularly, in pairs or as a team of 4, using a hydraulic power pack that can be supplied in either petrol or electric format.

The power packs can run up to 4 units at one time.



| PRODUCT CODE | S.W.L. |
|--------------|------------|
| HHLPM1.6T | 1.6t |
| HHLPM3.2T | 3.2t |
| HHLPPP | Power Pack |


Wire ropes should be ordered separately.

SHEAVE / SNATCH BLOCKS

Increases the load capacity of a lift / pulling machine or winch.

Also allows the user to change direction of the load or pull.
Available with a shackle or hook end fitting.

| PRODUCT CODE | S.W.L. |
|--------------|--------|
| HSB2T | 2t |
| HSB4T | 4t |
| HSB8T | 8t |

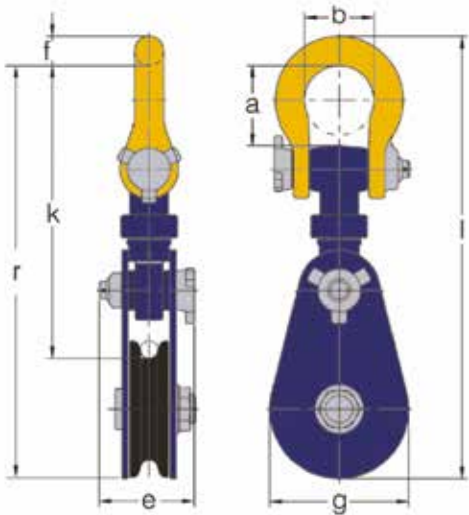

| WLL tonnes | Sheave Dia. mm | Wire Rope Size mm | A mm | B mm | E mm | F mm | G mm | K mm | L mm | R mm | Mass kg |
|---------------|-------------------|-------------------------|---------|---------|---------|---------|---------|---------|---------|---------|------------|
| 2.0 | 75 | 8-10 | 35 | 30 | 64 | 11 | 75 | 150 | 238 | 217 | 3.8 |
| 4.0 | 114 | 10-13 | 64 | 50 | 78 | 19 | 107 | 243 | 390 | 306 | 9.2 |
| 6.0 | 152 | 16-19 | 87 | 75 | 104 | 32 | 152 | 303 | 484 | 452 | 12.2 |
| 8.0 | 203 | 16-19 | 87 | 75 | 104 | 32 | 200 | 303 | 555 | 526 | 18.2 |
| 12.0 | 152 | 19-22 | 78 | 80 | 134 | 44 | 167 | 359 | 540 | 496 | 24.8 |
| 15.0 | 203 | 19-22 | 78 | 80 | 134 | 44 | 220 | 355 | 589 | 540 | 29.6 |
| 15.0 | 254 | 19-22 | 78 | 80 | 134 | 44 | 280 | 423 | 714 | 670 | 42.7 |
| 15.0 | 305 | 19-22 | 78 | 80 | 134 | 44 | 300 | 428 | 770 | 726 | 52.8 |
| 20.0 | 203 | 25-29 | 109 | 93 | 150 | 55 | 218 | 433 | 671 | 616 | 41.6 |
| 30.0 | 254 | 25-29 | 109 | 93 | 150 | 55 | 280 | 481 | 778 | 723 | 52.4 |
| 20.0 | 305 | 25-29 | 109 | 93 | 150 | 55 | 330 | 485 | 883 | 778 | 62.8 |

MINIFOR HOIST / WINCH

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-----------------------------------|--------|
| HM300 | Minifor Hoist | 300kg |
| HM500 | Minifor Hoist | 500kg |
| HM500R | Minifor Hoist with Remote Control | 50kg |
| HM500SK | Sheave Kit | 950kg |

- ▲ LIGHTWEIGHT AND EASY TO HANDLE
- ▲ REMOTE CONTROL AVAILABLE
- ▲ SHEAVE KIT FOR IMPROVED S.W.L. AVAILABLE

MINIFOR HOIST ROPE
TO SUIT 300KG OR 500KG

| PRODUCT CODE | DESCRIPTION |
|--------------|-------------|
| HMR10M | 10m Rope |
| HMR20M | 20m Rope |
| HMR30M | 30m Rope |
| HMR40M | 40m Rope |
| HMR60M | 60m Rope |
| HMR80M | 80m Rope |



AIR WINCHES

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|------------------------------|--------|
| HAW2T | Air Winch | 2t |
| HAWRB2T | Air Winch Rotating Base | 2t |
| HSVDS4T | Vertical Deck Sheave 12/13mm | 4t |

- RUGGED COMPACT AND VERSATILE DESIGN**
- MEETS ANSI / ASME B30.7
 - 5:1 DESIGN FACTOR AT RATED LOAD
 - TOP LAYER RATED LINE PULL
 - “LIFT TO SHIFT” WINCH MOUNTED LEVER THROTTLE
 - MINIMUM 18:1 DRUM DIAMETER TO WIRE ROPE DIAMETER RATIO
 - COMPACT GEARBOX-IN-DRUM DESIGN
 - STANDARD DESIGN TEMPERATURE RANGE IS 0°C THROUGH 60°C
 - GROUP OF MECHANISM AS PER FEM: 5M

- SUITABLE FOR HAZARDOUS EXPLOSION PROOF ENVIRONMENTS**
- FLAMEPROOF BY DESIGN. AIR MOTORS (UNLIKE ELECTRIC MOTORS)
 - ARE INHERENTLY SPARK RESISTANT
 - ATEX CLASSIFICATION (AS PER DIRECTIVE EC 94/9/EEC)
 - CE COMPLIANT MODELS MARKED EX II 2 GD C 200°C

- POWERFUL RADIAL PISTON AIR MOTOR**
- POSITIVE STARTING TORQUE
 - INFINITELY VARIABLE SPEEDS WITH PRECISION SPOTTING CONTROL
 - SUPERIOR RELIABILITY IN HARSH ENVIRONMENTS BRAKE SYSTEMS
 - MANUAL DRUM BRAKE STANDARD
 - OPTIONAL AUTO DRUM BRAKE AND / OR AUTO DISC AVAILABLE
 - FULLY ENCLOSED AUTOMATIC OIL BATH “WET” DISC BRAKE SEALED AGAINST MOISTURE AND CONTAMINANTS
 - INGERSOLL RAND RECOMMENDS THE USE OF AUTOMATIC



CABLE PULLING WINCH / ROLLERS

This compact unit is portable and ideal for cable pulling.

It includes forward and reverse mode, dual speed and overload protection. An excellent solution for guiding and protecting cables when being winched into position.

| PRODUCT CODE | DESCRIPTION | POWER | S.W.L. |
|--------------|---------------------|-------|--------|
| HCPW1.5T | Cable Pulling Winch | 110v | 1.5t |
| HCPW2.5T | Cable Pulling Winch | 110V | 2.5t |
| HCR2T | Cable Rollers | - | 2t |



TIRAK WIRE ROPE HOIST / WINCH

A powerful wire rope hoist that can be used for both lifting and pulling various applications.

Ropes should be ordered separately.

- ▲ MAXIMUM S.W.L. 1 TONNE
- ▲ UNLIMITED ROPE LENGTH
- ▲ CAN ALSO BE USED FOR MANRIDING

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-------------------------------|--------|
| HT1T | Tirak Wire Rope Hoist / Winch | 1t |
| HT3T | Tirak Wire Rope Hoist / Winch | 3t |



CLAMPS & TROLLEYS



ADJUSTABLE RAIL LIFTING CLAMP

Designed to lift single rails securely and safely.

The adjustable rail lifting clamp will fit most types of rail section sizes.

| PRODUCT CODE | S.W.L. |
|--------------|--------|
| HRLC1T | 1t |




GIRDER / BEAM CLAMP

Used as an anchor point for lifting or pulling purposes.

The girder / beam clamp can be supplied with or without permanent shackles.

| PRODUCT CODE | S.W.L. |
|--------------|--------|
| HGC1T | 1t |
| HGC2T | 2t |
| HGC3T | 3t |
| HGC5T | 5t |
| HGC10T | 10t |
| HGC15T | 15t |
| HGC20T | 20t |
| HGC30T | 30t |



| Model No. | WLL tonnes | Beam Range mm | Max. Beam Thickness mm | A mm | B mm | D mm | E max mm | E min mm | G mm | K max mm | K min mm | H mm | Mass kg |
|-----------|------------|---------------|------------------------|------|------|-------|----------|----------|------|----------|----------|------|---------|
| WH-BC2 | 2.00 | 76 - 190 | 20 | 100 | 3 | 90 | 254 | 133 | 270 | 263 | 223 | 20 | 4.00 |
| WH-BC3 | 3.00 | 76 - 190 | 28 | 100 | 12 | 182 | 273 | 166 | 375 | 269 | 261 | 26 | 8.00 |
| WH-BC3W | 3.20 | 127 - 350 | 28 | 100 | 12 | 100 | 438 | 228 | 565 | 375 | 294 | 30 | 11.00 |
| WH-BC4 | 4.00 | 105 - 254 | 24 | 130 | 10 | 112 | 371 | 185 | 410 | 369 | 308 | 25 | 11.00 |
| WH-BC5 | 5.00 | 76 - 190 | 24 | 100 | 12 | 116 | 306 | 194 | 395 | 338 | 360 | 25 | 10.00 |
| WH-BC5W | 5.00 | 150 - 300 | 24 | 100 | 12 | 118 | 422 | 264 | 410 | 413 | 360 | 25 | 15.00 |
| WH-BC6 | 6.00 | 203 - 457 | 36 | 140 | 12 | 116 | 606 | 367 | 560 | 511 | 420 | 25 | 18.80 |
| WH-BC10 | 10.00 | 303 - 457 | 36 | 140 | 20 | 118 | 606 | 367 | 560 | 630 | 421 | 30 | 26.00 |
| WH-BC15 | 15.00 | 303 - 457 | 66 | 170 | 20 | 116.5 | 648 | 400 | 660 | 684 | 638 | 40 | 49.50 |
| WH-BC15W | 15.00 | 406 - 612 | 66 | 170 | 20 | 116.5 | 800 | 600 | 810 | 812 | 708 | 40 | 58.00 |

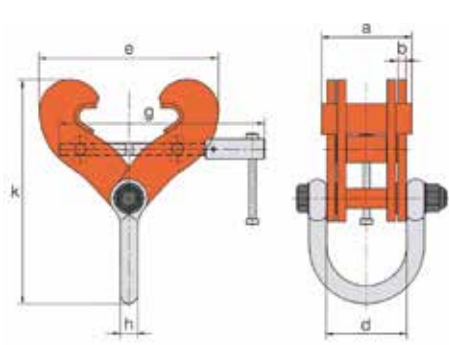

GIRDER / BEAM TROLLEY - PUSH TRAVEL

Provides a suspension point that can be moved along a runway beam.

Enabling exact positioning or easy traversing of large loads incorporating manual hoists, can be supplied to suit various track widths.

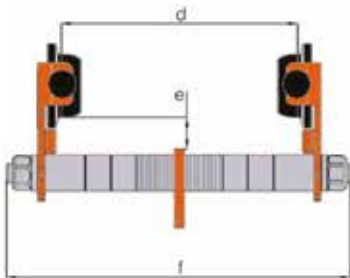


| PRODUCT CODE | S.W.L. |
|--------------|--------|
| HPT1T | 1t |
| HPT2T | 2t |
| HPT3T | 3t |
| HPT5T | 5t |
| HPT10T | 10t |
| HPT15T | 15t |
| HPT20T | 20t |

| Model No. | WLL tonnes | Beam Range mm | Max. Beam Thickness mm | A mm | B mm | D mm | E max mm | E min mm | G mm | K max mm | K min mm | H mm | Mass kg |
|-----------|------------|---------------|------------------------|------|------|-------|----------|----------|------|----------|----------|------|---------|
| WH-BC2 | 2.00 | 76 - 190 | 20 | 130 | 3 | 90 | 254 | 133 | 275 | 263 | 203 | 29 | 4.00 |
| WH-BC3 | 3.00 | 76 - 190 | 28 | 130 | 12 | 102 | 275 | 166 | 375 | 289 | 251 | 30 | 8.00 |
| WH-BC3W | 3.20 | 127 - 350 | 28 | 130 | 12 | 102 | 438 | 228 | 560 | 375 | 294 | 30 | 11.00 |
| WH-BC4 | 4.00 | 150 - 254 | 24 | 130 | 10 | 112 | 371 | 185 | 410 | 360 | 306 | 25 | 11.00 |
| WH-BC5 | 5.00 | 76 - 190 | 24 | 130 | 12 | 118 | 306 | 101 | 295 | 338 | 300 | 25 | 10.00 |
| WH-BC5W | 5.00 | 130 - 300 | 24 | 130 | 12 | 118 | 422 | 264 | 410 | 413 | 380 | 25 | 15.00 |
| WH-BC6 | 6.00 | 203 - 457 | 36 | 140 | 12 | 118 | 608 | 267 | 560 | 511 | 402 | 25 | 18.80 |
| WH-BC10 | 10.00 | 203 - 457 | 36 | 140 | 20 | 118 | 608 | 267 | 560 | 530 | 421 | 32 | 26.00 |
| WH-BC15 | 15.00 | 203 - 457 | 66 | 170 | 20 | 118.5 | 648 | 400 | 660 | 664 | 606 | 40 | 48.50 |
| WH-BC15W | 15.00 | 406 - 610 | 66 | 170 | 20 | 118.5 | 800 | 600 | 810 | 812 | 706 | 40 | 58.50 |

GEARED GIRDER / BEAM TROLLEY - INTEGRATED CLAMP

Provides a suspension point that can be moved along a runway beam via a geared mechanism.

Enabling exact positioning or easy traversing of large loads incorporating manual hoists, can be supplied to suit various track widths.

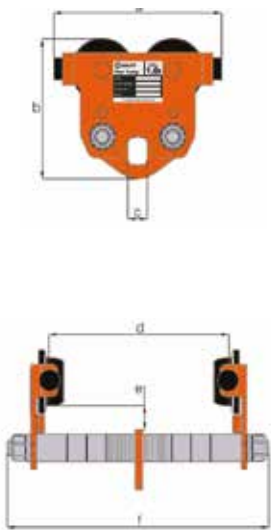

| PRODUCT CODE | S.W.L. | H.O.L. |
|--------------|--------|--------|
| HGT1T | 1t | 3m |
| HGT2T | 2t | 3m |
| HGT3T | 3t | 3m |
| HGT5T | 5t | 3m |
| HGT10T | 10t | 3m |
| HGT15T | 15t | 3m |
| HGT20T | 20t | 3m |

| WLL tonnes | Min. Radius of Curve m | a mm | b mm | c mm | e mm |
|------------|------------------------|------|------|------|------|
| 0.50 | 0.8 | 190 | 154 | 22 | 27 |
| 1.00 | 0.9 | 206 | 186 | 30 | 26 |
| 2.00 | 1.0 | 248 | 210 | 37 | 26 |
| 3.20 | 1.2 | 300 | 249 | 42 | 26 |
| 5.00 | 1.3 | 336 | 277 | 50 | 37 |
| 10.00 | 2.0 | 396 | 334 | 58 | 37 |

Standard Range 1

| WLL tonnes | I Beam width mm | d Max. Width mm | f Max. mm | Mass kg |
|------------|-----------------|-----------------|-----------|---------|
| 0.5 | 50-203 | 203 | 323 | 9.60 |
| 1.0 | 64-203 | 203 | 332 | 12.30 |
| 2.0 | 88-203 | 203 | 341 | 17.20 |
| 3.2 | 100-203 | 203 | 359 | 28.40 |
| 5.0 | 114-203 | 203 | 366 | 40.10 |
| 10.0 | 124-203 | 203 | 366 | 62.00 |

Extended Range 2


| WLL tonnes | I Beam width mm | d Max. Width mm | f Max. mm | Mass kg |
|------------|-----------------|-----------------|-----------|---------|
| 0.5 | - | - | - | - |
| 1.0 | 64-305 | 305 | 434 | 13.70 |
| 2.0 | 88-305 | 305 | 443 | 19.00 |
| 3.2 | 100-305 | 305 | 461 | 31.20 |
| 5.0 | 114-305 | 305 | 466 | 44.20 |
| 10.0 | 124-305 | 305 | 488 | 67.00 |

ADJUSTABLE GIRDER / BEAM TROLLEY WITH INTEGRATED CLAMP

This useful tool allows the trolley to be used either as a fixed or moving anchor point.

If required, a version certified for man riding use is also available.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|--|--------|
| HGTC2T | Adjustable Girder / Beam Trolley with Integrated Clamp | 1t |
| HGTC3.2T | Adjustable Girder / Beam Trolley with Integrated Clamp | 3.2t |
| HGTC6T | Adjustable Girder / Beam Trolley with Integrated Clamp | 6t |

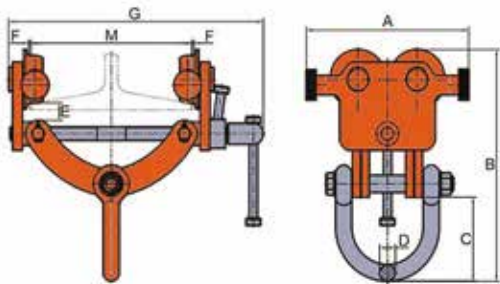

| WLL tonnes | Min. Radius of Curve m | A mm | B mm | C mm | D mm | E mm | F mm | G mm | Beam Width M mm | Mass kg |
|------------|------------------------|------|-----------|------|------|------|------|------|-----------------|---------|
| 2.00 | 0.7 | 204 | 276 - 322 | 100 | 20 | 21 | 2.5 | 320 | 76 - 203 | 8.10 |
| 3.20 | 1.1 | 246 | 334 - 374 | 111 | 20 | 25 | 2.5 | 330 | 76 - 203 | 14.25 |
| 6.00 | 1.4 | 286 | 364 - 463 | 124 | 25 | 33 | 3.0 | 454 | 100 - 305 | 27.40 |



AS WELL AS SUPPLYING HEIGHT SAFETY EQUIPMENT ON A HIRE OR SALES BASIS, LIFTING GEAR UK CAN ALSO INSPECT AND SERVICE HARNESSES AND LANYARDS AS REQUIRED UNDER LOLER.

PLEASE CALL YOUR LOCAL BRANCH FOR FURTHER DETAILS.

LIFTING MAGNET

Lightweight and easy to use.

The lifting magnet is used for the movement of ferrous materials in a variety of industrial applications.

| PRODUCT CODE | S.W.L. |
|--------------|--------|
| HML250 | 250kg |
| HML500 | 500kg |
| HML1T | 1t |
| HML2T | 2t |



- LOADING / UNLOADING MACHINE TOOLS
- HANDLING OF BAR, TUBE AND PROFILES IN THE WAREHOUSE
- HANDLING OF PLATE, TUBE, BAR AND PROFILES IN THE STEEL CONSTRUCTION



PIPE LIFTING HOOKS

Used in pairs, these hooks fit into the ends of the pipes.

This allows them to be lifted with a 2-leg chain-sling.



| PRODUCT CODE | S.W.L. |
|--------------|--------|
| HPLH2T | 2t |
| HPLH4T | 4t |
| HPLH6T | 6t |
| HPLH20T | 20t |

HORIZONTAL PLATE CLAMPS

Used in pairs the horizontal plate clamp is designed for loading process machines and to lift and transport sheet steel plate in horizontal position.

It is recommended to use two pairs in conjunction with a spreader beam for handling large plates. Designed to be used with two legged slings only.

Please state the thickness of the plate to be lifted when ordering.

| PRODUCT CODE | S.W.L. | PLATE THICKNESS |
|--------------|--------|-----------------|
| HHPC2T | 2t | 5-32mm |
| HHPC4T | 4t | 5-50mm |
| HHPC6T | 6t | 5-75mm |
| HHPC10T | 10t | 5-100mm |



4 POINT DRUM LIFTER

Semi-automatic Drum Tongs, suitable for picking up 1 x 210l drum.

The Drum Tongs can be suspended from a fork-mounted hook, job or crane. The tong has a hook that automatically releases when lowered onto the drum, allowing it to be lifted, but has to be manually located to lift it clear off the drum.

PRODUCT CODE

HDT4P500

S.W.L.

500kg



VERTICAL PLATE CLAMPS

Enables plates to be turned over or lifted from the horizontal to a true vertical position.

Clamps are available with soft jaws for polished metals.

| PRODUCT CODE | S.W.L. | PLATE THICKNESS |
|--------------|--------|-----------------|
| HVC1T | 1t | 0-20mm |
| HVC2T | 2t | 0-32mm |
| HVC3T | 3t | 0-32mm |
| HVC4T | 4t | 0-32mm |
| HVC6T | 6t | 0-50mm |
| HVCT6T | 6t | 50-100mm |
| HVC10T | 10t | 0-50mm |
| HVCT10T | 10t | 50-100mm |



CAMLOCK CLT / CLB CONTAINER LIFTING LUGS

There are two types of lugs for lifting shipping containers, the CLT is for top lifting and the CLB is for side lifting.

Supplied in sets of four with lifting capacities up to 56 tonne these lugs create the ideal lashing point for easier transportation of large containers.

S.W.L. dependent on sling angles.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|------------------------------------|--------|
| HCTL | Container Twist Locks Vertical Lug | 56t |
| HCTLS | Container Twist Locks Side Lug | 32-52t |

- ▲ The CLT top lifting lugs are vertically mounted on top of the container and are locked into position by simply turning the lug 90 degrees. These lugs enable transportation with a lifting frame and cables, chains or slings.
- ▲ The CLB lugs are fixed to the sides of the container at either the top or the bottom fixing holes. They incorporate spring loaded bolts to prevent accidental release for extra safety.
- ▲ **N.B.** Not to be used with a 4 leg chain sling - due to wrong angles.




ADJUSTABLE RAIL LIFTING CLAMP

The CR rail clamps are designed to lift single rails securely and safely.

The CRT is designed to lift tram rail. The clamps are designed to fit most types of rail section currently in use. The clamps have a narrow profile to enable attachment to an individual rail when rails are side by side. The clamps are locked onto the rail-head via a lever operated spring mechanism. It is recommended to use clamps suspended from a lifting beam for long rail lengths



| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-------------------------------|--------|
| CRLC1T | Adjustable Rail Lifting Clamp | 1t |
| CRLC2T | Adjustable Rail Lifting Clamp | 2t |



| MODEL | CR1000 (MM) | CR2000 (MM) |
|-------|-------------|-------------|
| A* | 144 | 144 |
| B | 152 | 163 |
| C | 350 | 350 |
| D | 90 | 90 |
| E | 46 | 46 |
| ØF | 20 | 20 |
| G | 25 | 25 |

*scissor

MATERIAL LIFTS, GANTRIES & FLOOR CRANES



ALUMINIUM / STEEL GANTRY

- ▲ LIGHTWEIGHT AND EASY TO ASSEMBLE
- ▲ PORTABLE AND ADJUSTABLE IN BOTH HEIGHT AND BEAM LENGTHS
- ▲ THE PERFECT SOLUTION FOR ANY HANDLING PROBLEMS
- ▲ IDEAL FOR CONFINED SPACES, ROOFTOPS AND CLEAN ENVIRONMENTS
- ▲ A SECOND TROLLEY IS AVAILABLE FOR DUAL LIFTS

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-------------------------------|----------|
| HAG1TS | Small Aluminium Gantry | 1t |
| HAG1T | Intermediate Aluminium Gantry | 1t |
| HAG1TT | Tall Aluminium Gantry | 1t |
| HAG2TS | Small Aluminium Gantry | 2t |
| HAG2T | Intermediate Aluminium Gantry | 2t |
| HAG2TT | Tall Aluminium Gantry | 2t |
| HAG3TS | Small Aluminium Gantry | 3t |
| HAG3T | Intermediate Aluminium Gantry | 3t |
| HAG3TT | Tall Aluminium Gantry | 3t |
| HAG5TS | Small Aluminium Gantry | 5t |
| HAG5T | Intermediate Aluminium Gantry | 5t |
| HAG5TT | Tall Aluminium Gantry | 5t |
| HAG1TTC1 | TC1 Aluminium Gantry | 1.7t |
| HAG3TTC2 | TC2 Aluminium Gantry | 3t |
| HAG5TTC3 | TC3 Aluminium Gantry | 5t |
| HAG5TTC4 | TC4 Aluminium Gantry | 5t |
| HAGB | Supplied with Beams up to 9m | Up to 5t |



PORTA-GANTRY DETAILED DIMENSIONS

| | | Dmax | E | Dmin | F | Hmax | Hmin | G | | | |
|----------|---|----------------------------|------------------|----------------------------|----------------------------|-----------------------------|------------------------------|-------|--------------|-------------|-------------|
| | | Max. height to lifting eye | Height increment | Min. height to lifting eye | Max. height to top of beam | Max height to top of roller | Min. height to top of roller | Width | A-frame (kg) | Roller size | Castor size |
| WLL 500 | S | 2355 | 5 x 150 | 1605 | 2675 | 2757 | 2007 | 1212 | 33 | 82 | s |
| | M | 2851 | 5 x 150 | 2101 | 3171 | 3253 | 2503 | 1429 | 40 | 82 | s |
| | I | 3188 | 5 x 200 | 2188 | 3499 | 3581 | 2581 | 1726 | 46 | 82 | l |
| | T | 4079 | 6 x 200 | 2879 | 4399 | 4481 | 3281 | 2011 | 51 | 82 | l |
| WLL 1000 | S | 2355 | 5 x 150 | 1605 | 2675 | 2757 | 2007 | 1212 | 33 | 82 | s |
| | M | 2851 | 5 x 150 | 2101 | 3171 | 3253 | 2503 | 1429 | 40 | 82 | s |
| | I | 3188 | 5 x 200 | 2188 | 3499 | 3581 | 2581 | 1726 | 46 | 82 | l |
| | T | 4079 | 6 x 200 | 2879 | 4399 | 4481 | 3281 | 2011 | 51 | 82 | l |
| WLL 2000 | S | 2355 | 5 x 150 | 1605 | 2675 | 2757 | 2007 | 1212 | 38 | 82 | s |
| | M | 2851 | 5 x 150 | 2101 | 3171 | 3253 | 2503 | 1429 | 40 | 82 | s |
| | I | 3188 | 5 x 200 | 2188 | 3499 | 3581 | 2581 | 1726 | 46 | 82 | l |
| | T | 4079 | 6 x 200 | 2879 | 4399 | 4481 | 3281 | 2011 | 51 | 82 | l |
| WLL 3000 | S | 2410 | 5 x 150 | 1660 | 2730 | 2812 | 2062 | 1212 | 55 | 82 | l |
| | M | 2906 | 5 x 150 | 2156 | 3226 | 3308 | 2558 | 1429 | 60 | 82 | l |
| | I | 3188 | 5 x 200 | 2188 | 3499 | 3581 | 2581 | 1726 | 70 | 82 | l |
| | T | 4079 | 6 x 200 | 2879 | 4399 | 4481 | 3281 | 2011 | 82 | 82 | l |
| WLL 5000 | I | 3181 | 5 x 200 | 2181 | 3592 | 3717 | 2717 | 1736 | 97 | 125 | l |
| | T | 4049 | 6 x 200 | 2849 | 4487 | 4612 | 3412 | 2021 | 106 | 125 | l |

PORTA-GANTRY DETAILED DIMENSIONS

| | | STANDARD BEAM LENGTH | | | | | | | |
|---------|------|----------------------|------|------|------|------|------|------|------|
| | | 2500 | 3000 | 3920 | 4570 | 5500 | 6000 | 8400 | 9000 |
| WLL 500 | 500 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 1000 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 2000 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✗ |
| | 3000 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✗ |
| | 5000 | ✓ | ✓ | ✓ | ✓ | ✓ | ✗ | ✗ | ✗ |

SHEAR LEGS



- ▲ QUICK & EASY TO ASSEMBLE
- ▲ FULLY ADJUSTABLE
- ▲ SUSPENSION POINT PROVIDED FOR A HOIST, TO LOWER EQUIPMENT INTO THE GROUND

| PRODUCT CODE | S.W.L. | MAX. HEIGHT |
|--------------|--------|-------------|
| HSL500 | 500kg | 3m |
| HSL1T | 1t | 3m |
| HSL2T | 2t | 3m |

MANRIDING / GOODS LIFTING TRIPOD

This handy tripod can be utilised for both lowering personnel below ground and the lowering and lifting of tools and heavy items from below ground.

The tripod can be fitted with 2 winches (one manriding and one lifting), removing the need for an additional chainblock.

| PRODUCT CODE | S.W.L. | WIRE DRO |
|-----------------|------------------|----------|
| HFAT | Manriding Tripod | N/A |
| GOODS WINCH | 250kg | 20m |
| MANRIDING WINCH | 1 man | 20m |

- ▲ S.W.L. FOR LIFTING 250KG
- ▲ FITS EASILY IN TO THE BACK OF A SMALL VAN
- ▲ RESCUE HARNESS AVAILABLE



COUNTER BALANCE MATERIAL LIFT

This useful material lift can be moved under load as per a fork lift truck.



- IDEAL FOR PLACING ITEMS FLUSH TO THE WALL
- GLASS LIFTING ATTACHMENT AVAILABLE
- FOR MOVEMENT OF LOADS ON FIRM AND LEVEL GROUND ONLY

| Technical Data | SLK-5 | SLK-10 | SLK-15 | SLK-20 | SLK-25 |
|---|-------|--------|--------|--------|--------|
| Lifting height - Standard forks up: | 2.00m | 3.50m | 5.00m | 6.50m | 7.90m |
| Height - stowed: | 2.04m | 2.04m | 2.04m | 2.04m | 2.04m |
| Length - stowed: | 0.90m | 0.90m | 0.90m | 0.96m | 1.02m |
| - Working position | 1.50m | 1.50m | 1.80m | 2.22m | 2.22m |
| Width - stowed: | 0.80m | 0.80m | 0.80m | 0.80m | 0.80m |
| - Working position: | 2.20m | 2.20m | 2.20m | 2.20m | 2.20m |
| Ground clearance - working position: | 0.08m | 0.08m | 0.08m | 0.08m | 0.08m |
| Loading height min.: | 0.27m | 0.27m | 0.27m | 0.27m | 0.27m |
| Pay load: | 450kg | 450kg | 360kg | 360kg | 300kg |
| Weight basic chassis: | 98kg | 118kg | 144kg | 184kg | 204kg |
| Weight complete (*ex counterbalance weights @ 16kg) : | 226kg | 246kg | 272kg | 312kg | 332kg |

| PRODUCT CODE | DESCRIPTION | MAX. H.O.L. | S.W.L. |
|--------------|-------------------------------------|-------------|--------|
| HCBMLSLK5 | Counter Balance Material Lift SLK5 | 2m | 450kg |
| HCBMLSLK10 | Counter Balance Material Lift SLK10 | 3.5m | 450kg |
| HCBMLSLK15 | Counter Balance Material Lift SLK15 | 5m | 360kg |
| HCBMLSLK20 | Counter Balance Material Lift SLK20 | 6.5m | 360kg |
| HCBMLSLK25 | Counter Balance Material Lift SLK25 | 7.9m | 300kg |
| HMLGLA | Glass Vacuum Attachment | | 200kg |

PACKAWAY FLOOR CRANE

Hydraulic crane, ideal for lifting engines or other heavy objects.

The Packaway Floor Crane folds up for easy transportation and easy set up.

- QUICK LIFTING WITH A DOUBLE ACTING PUMP
- 3 POSITIONS ADJUSTABLE JIB EXTENSION
- RELIEF VALVE TO PREVENT OVERLOADING
- 360° SWIVEL OPERATING HANDLE
- FORGED HEAVY-DUTY SWIVEL HOOK

| PRODUCT CODE | S.W.L. |
|--------------|--------|
| HPFC500 | 500kg |
| HPFC1T | 1t |
| HPFC2T | 2t |



COUNTER BALANCE FLOOR CRANE

Manoeuvrable floor crane providing an overhead lifting point where no lifting point exists.

Perfect for situations where outreach is required. Please note that the hire rate does not include the 12.5kg hand weights that are required to provide counter balance.

- ▲ INDIVIDUALLY TESTED TO 125% OF MAXIMUM CAPACITY
- ▲ HEAVY DUTY DOUBLE ACTING PUMP FOR FAST ACTION
- ▲ FITTED WITH OVERLOAD SAFETY VALVE
- ▲ 3 POSITION EXTENDING JIB
- ▲ SWIVEL HOOK WITH SAFETY LATCH

| PRODUCT CODE | S.W.L. |
|--------------|----------------------------|
| HCBFC500 | 500kg |
| HCBFC1T | 1t |
| HHW | 12.5kg Hand Weights (each) |



COMPACT GENIE LIFT



GL10



GL8

- ▲ HIGHLY COMPACT
- ▲ ADJUSTABLE OPERATING LENGTH
- ▲ WILL FIT THROUGH A STANDARD DOORWAY
- ▲ EASY TRANSPORTATION AND SET UP

| PRODUCT CODE | DESCRIPTION | DIMENSIONS (CLOSED) | S.W.L. | MAX. H.O.L. |
|--------------|----------------------|---------------------|--------|-------------|
| HMLGL8 | GL8 | 1.72mx0.3mx0.63m | 181kg | 3.06m |
| HMLGL8CB | GL8 Counter Balance | 1.745mx0.3mx0.63m | 181kg | 3.06m |
| HMLGL10 | GL10 | 2mx0.49mx0.73m | 196kg | 3.56m |
| HMLGL10CB | GL10 Counter Balance | 2.025mx0.49mx0.73m | 196kg | 3.56m |
| HMLGL12 | GL12 | 2.31mx0.49mx0.73m | 159kg | 4.2m |

BEAM LIFTER

The Beam Lifter (600kg) is a simpler and more robust device for material handling. No cables or guides, just a simple screw mechanism, which is similar to the acrow prop operation can be wound up to required height.

It is a compact detachable elevator on wheels for lifting and fitting heavy loads such as steel beams.

Ideal for renovation projects.



| PRODUCT CODE | DESCRIPTION | S.W.L. | MIN. WORKING HEIGHT | MAX. WORKING HEIGHT |
|--------------|--------------------|--------|---------------------|---------------------|
| HBL600KG | Beam Lifter (each) | 600kg | 1.1m | 3m |

IDEAL FOR INSTALLING RSJs IN RESTRICTED AREAS

- ▲ LIFTING CAPACITY 600KG
- ▲ MAXIMUM LIFTING HEIGHT 3M
- ▲ HIGH PRECISION BY USING SCREW THREAD ADJUSTMENT
- ▲ FULLY DETACHABLE AND EASY TO BUILD UP
- ▲ USES TWO ELEVATORS FOR FITTING BEAMS
- ▲ CRANE HOOK TO LIFT LOADS FROM THE GROUND
- ▲ ROTATIONAL PLATFORM

IMPORTANT INFORMATION

| | |
|-----------------------------|--------------------------------|
| Lifting Height | 1.10 - 2.75m |
| With Adapter | 1.36 - 3.00m |
| Load-Bearing Capacity | 600kg |
| In Case of Paired Operation | 2 x 450kg = 900kg (not 1200kg) |



MATERIAL LIFT - GENIE SUPERLIFT ADVANTAGE

| PRODUCT CODE | CLOSED UP DIMENSIONS | MAX. H.O.L. | RATED S.W.L. |
|--------------|----------------------|-------------|--------------|
| HMLSWLA10 | 1.5m x 0.8m x 2m | 2.97m | 454kg |
| HMLSWLA15 | 1.88m x 0.8m x 2m | 4.46m | 363kg |
| HMLSWLA20 | 2.08m x 0.8m x 2m | 5.94m | 363kg |
| HMLSWLA25 | 2.08m x 0.8m x 2m | 7.62m | 295kg |

Our material lifts can be used for most handling applications such as maintenance or installation.

The maximum S.W.L. of the lifts is 454kg and the maximum H.O.L. (height of lift) available is 7.62m.

Made with a lightweight aluminium construction, these lifts can easily be transported and can access the most restricted areas.



MATERIAL LIFT ACCESSORIES

TO SUIT SLA10 | SLA15 | SLA20 | SLA25

Utilise your material lift for a number of applications by teaming it up with one of our useful accessories.

EXTENSION FORKS

Fit over the standard forks to lift bulkier loads

LIFTING BOOM

Allows the lift to be utilised as a crane

LOAD PLATE

A flat raisable surface for non-palletted loads

PIPE CRADLE

Can be used to lift pipework without the risk of the load rolling



| PRODUCT CODE | DESCRIPTION |
|--------------|------------------------------|
| HMLFE | Material Lift Fork Extension |
| HMLLPL | Material Lift Load Plate |
| HMLPC | Material Lift Pipe Cradle |
| HMLPB | Material Lift Lifting Boom |

RAPIDE PORTA-GANTRY

The easy-to-transport, mobile lifting gantry, RAPIDE PORTA-GANTRY adds exciting new dimensions to the PORTA-GANTRY family, as a unique rapid deployment system with goods and personnel lifting (man-ride) capability with full EN795 Type B certification.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-----------------------------------|--------|
| HRGB0.5T2M | RAPIDE Porta-Gantry 2m | 0.5t |
| HRGB0.5T2.3M | RAPIDE Porta-Gantry 2.3m | 0.4t |
| HRGB0.5T4M | RAPIDE Porta-Gantry 4m | 0.25t |
| HRGT0.5T | RAPIDE Porta-Gantry Trolley | 0.5t |
| HRSNG | RAPIDE Stow & Go | |
| HRBRFA | Blocfor Fall Arrest Block C/W Arm | |



The **PORTA-GANTRY RAPIDE** adds exciting new dimensions to the **PORTA-GANTRY** family. A patented gantry that can be assembled in under 60 seconds for both goods and personnel lifting (man-ride) applications.

QUICK RELEASE PINS

Quick assembly with ball lock pins, no bolts or tools required

STOW'N'GO

A handy storage container for safe shipping and transportation



LOAD TROLLEY

Innovative quick release gated trolley or sheave carrier fitted in seconds

RAPID ATTACHMENTS

Winching accessories can be easily added without the need for tools

COMPACT

Frames easily fold onto beam, forming compact stowable unit. Easily fits into a typical service van

TRANSPORTABILITY

Easily transported by 1 person with integrated wheel and carry-handle or carried by 2 persons

PORTA-GANTRY RAPIDE Dimensions (mm)



PGR1T



ASSEMBLY VIDEO

| | DIMENSIONS (MM) | | | | | | | | | | | | | | WLL | | | UNIT WEIGHT |
|--------|---------------------|------|----------|----------|----------|----------|----------|----------|----------|----------|------|----------|----------|------|---------------------------|---|--------------------------------------|-------------|
| | A BEAM LENGTH | B | C MIN | C MAX | D MIN | D MAX | E MIN | E MAX | F MIN | F MAX | G | H MIN | H MAX | J | GOODS CAPACITY (KG) | FALL ARREST CAPACITY* NO OF PERSON(S) | PERSONNEL POSITION- ING** (KG) | (KG) |
| PGRS20 | 2000 | 2076 | 1100 | 1500 | 1438 | 1938 | 1614 | 2114 | 1764 | 2264 | 1158 | 1550 | 2050 | 2190 | 500 | 3 | 250 | 33 |
| PGRS23 | 2300 | 2376 | 1200 | 1900 | | | | | | | | | | 2376 | 400 | 2 | 200 | 35 |
| PGRS40 | 4000 | 4076 | 2700 | 3500 | | | | | | | | | | 4076 | 250 | 1 | 125 | 40 |

*Trolley stops fitted to beam **Ratings using European standards. Contact REID for other standards.



GENIE GAS POWERED 'SUPERHOIST'

This pneumatic hoist is powered by either CO2 or compressed air and makes easy work of positioning loads such as ductwork or ceiling panels in restricted areas.

Its compact design allows it to be folded up and fitted into the boot of most cars.

Compressors or CO2 available upon request.

| PRODUCT CODE | S.W.L. | MAX. H.O.L. |
|--------------|--------|-------------|
| HMLSH3.8M | 136kg | 3.8m |
| HMLSH5.6M | 113kg | 5.6m |




PANEL LIFTER

This panel lifter is designed to lift plasterboard and similar sheet products to ceiling level, making fixing work easy.

An extension bar is available for higher lifts.

| PRODUCT CODE | DESCRIPTION | S.W.L. | MAX. H.O.L. |
|--------------|-----------------------------------|--------|---------------|
| HPL68KG | Panel Lifter | 68kg | 3.35m |
| HPLEF | Extension Bar (to fit Panel Lift) | 68kg | 4.57m (total) |

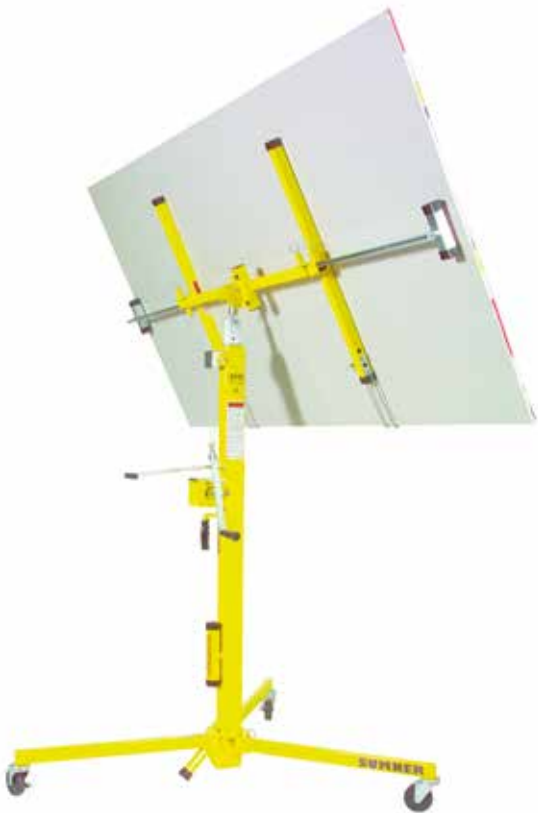

- ▲ SOLID, SAFE CONSTRUCTION
- ▲ LIGHTWEIGHT - 99 LB (45KG)
- ▲ TWO SPEED WINCH HANDLE
- ▲ QUICK, TOOL-FREE ASSEMBLY
- ▲ ONE PERSON OPERATION
- ▲ TILTS 65° FOR DRYWALL INSTALLATION

MATERIAL LIFT ROUST-A-BOUT

Roust-a-bouts are capable of lifting up to 680kg and to a height of 7.6m (25ft).

- MOVES VERTICALLY AND HORIZONTALLY
- 2 WINCHES: OPERATE LOAD AND MAST
- ELEVATION SEPARATELY
- 4-SPEED LOAD WINCHES
- INFINITE LOAD HEIGHT ADJUSTMENT
- IDEAL FOR JOB OR SHOP
- TEE HEAD EXTENSION AVAILABLE FOR WIDER LOADS UP TO 1,000 LBS (455KG)



| PRODUCT CODE | DESCRIPTION | S.W.L. | S.W.L. WITH T HEAD | MAX. WORKING HEIGHT |
|--------------|----------------------------|--------|--------------------|---------------------|
| HRAR100 | Roust-A-Bout AR100 | 680kg | 455kg | 4.6m |
| HRAR250 | Roust-A-Bout AR250 | 680kg | 455kg | 7.6m |
| HRAR100TH | T-Head Extension for AR100 | N/A | N/A | N/A |
| HRAR250TH | T-Head Extension for AR250 | N/A | N/A | N/A |

SITE HOISTS & CONVEYORS



PALANBOX HOIST

These lightweight, AC compact hoists are an ideal product for lifting heights up to 24 metres.

Single phase, easily used on scaffolds or lifting arms with astonishing efficiency.

110v | S.W.L. 200KG

| PRODUCT CODE | DESCRIPTION | S.W.L. | H.O.L. | POWER |
|--------------|----------------|--------|--------|-------|
| HPBH200KG | Palanbox Hoist | 200kg | 25m | 110V |

- ▲ DYNAMIC AND MECHANICAL BRAKE PROVIDES INSTANT AND SAFE BRAKING
- ▲ LIGHTWEIGHT AND COMPACT DESIGN FOR EASY HANDLING AND INSTALLATION
- ▲ SUPPLIED COMPLETE WITH WIRE ROPE, GALVANISED FINISH FOR LONGER LIFE
- ▲ AUTOMATIC UPPER AND LOWER LIMIT SWITCH WHEN ROPE COMES INTO CONTACT WITH LIMIT ARM, HOISTING IS AUTOMATICALLY STOPPED
- ▲ 360° WEIGHTED SAFETY HOOK SWIVEL TYPE WITH SAFETY CATCH



SCAFFOLD JOB HOIST

Our lightweight jib mounted 'clip-on' scaffold hoists weigh only 42kg and run on 110v single phase power.

| PRODUCT CODE | DESCRIPTION | S.W.L. | H.O.L. |
|--------------|------------------------|--------|--------|
| HSC200 | Scaffold Hoist Clip-On | 200kg | 25m |
| HTBK90L | Bucket | N/A | N/A |



- WILL EASILY FIT ONTO ANY VERTICAL SCAFFOLD PILE
- FULL RANGE OF BUCKETS AVAILABLE
- THE HOISTS SWING ARM JOB ALLOWS IT TO ROTATE 180°

**HIRE
or SALE**
IN STOCK
NOW!



SCAFFOLD PULLEY WHEEL

Traditional scaffold aid, used with polypropylene rope.

Other products include a full automatic brake, for safe use with light loads and a hoisting rope is available on a sales basis only.

| PRODUCT CODE | S.W.L. |
|--------------|--------|
| HPW50 | 50kg |
| HPW250 | 250kg |


BUILDER'S GANTRY HOIST

The builder's gantry hoist has a 42m height of lift and is designed to be used within scaffolding or on a flat room where there is no scaffold to attach a lifting hoist.

It has a running beam 3.3m long and allows an overhang of 1m beyond the edge of the safety board to enable material to be manoeuvred along the hoist runway safely and without effort.

Ballast box & weights are charged separately.

- Every hoist comes with a steel rope cable drum that is installed transverse to the mounting bracket. This promotes smooth winding and eliminates dangerous accumulation of the rope on one side only, otherwise caused by the flexing of the support structures.
- The hoists are all fitted with an upper limit safety device with positive drive by thrusting spring that stops the upward movement of the load in the highest point.
- It has a top limit lever and micro switch to stop the hoist when it is at the top of its lift safely.
- The hook has a spring-loaded safety catch to keep the load carrier within the hook.
- The Hoist also has a Brake to control the travel along its runway and Rubber stops at each end of the travel.
- The gantry hoist is ideal for the small builder or larger contractor to lift material from the ground or lower material to the ground safely.

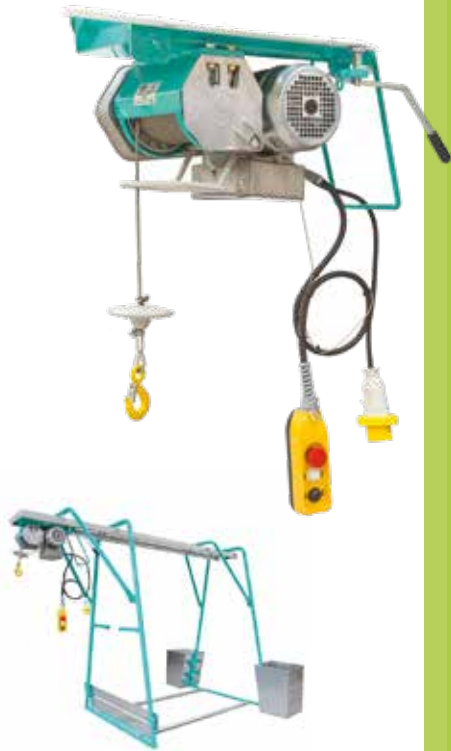

| PRODUCT CODE | DESCRIPTION | S.W.L. | H.O.L. | VOLTAGE REQUIRED |
|--------------|----------------------------------|--------|--------|------------------|
| HBGH300 | Builder's Gantry Hoist | 300kg | 25m | 110v |
| HBGH500 | Builder's Gantry Hoist | 500kg | 25m | 415v |
| HTBK120L | Bucket (120ltr) | N/A | N/A | N/A |
| HHW | Ballast Box Weights (per 12.5kg) | N/A | N/A | N/A |

BUMPA HOIST - TILE & SLATE CONVEYOR

The time-consuming, back-breaking chore of loading heavy loads onto rooftops repetitively, becomes quick and easy with the BUMPA loading machine.

| PRODUCT CODE | DESCRIPTION | S.W.L. | MAX. HEIGHT |
|--------------|-----------------|--------|-------------|
| HBH8M | BUMPA Hoist 8m | 80kg | 8m |
| HBH10M | BUMPA Hoist 10m | 80kg | 10m |



Today's regulations state you must provide a mechanical means for handling repetitive heavy loads, rather than relying on manual labour.

BUMPA is proven to double your performance for half the effort, helping you compete and comply!

- LOAD ON THE ROOF OF ANY SMALL VAN
- UP & RUNNING IN 4 MINUTES
- WILL CLEAR A PALLET OF CONCRETE BLOCKS IN LESS THAN 1 MINUTE OR 1000 TILES IN 25 MINUTES

HODDI HOIST - BUILDING MATERIAL CONVEYOR

The Hoddi Hoist 5m 110v is aimed at the builder as opposed to the roofer, and caters for the 3 standard lifts in 2 storey home buildings.

- ▲ FULLY REVERSIBLE WITH REMOTE STOP / START
- ▲ PORTABLE AND TRANSPORTABLE
- ▲ EASILY SET UP IN 5 MINUTES
- ▲ COMES COMPLETE WITH ALL ATTACHMENTS
- ▲ NO NEED FOR ASSEMBLY
- ▲ TRANSPORT BRICKS, BLOCKS, SLABS, MORTAR, LINTELS, FRAMES, STONE AND MUCH MORE

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|--------------------|--------|
| HHH5M | Hoddi Hoist 5m | 80kg |
| HHB | Hoddi Hoist Bucket | N/A |



MATERIAL CONVEYORS

These units come in 3.1m lengths and can be used individually or as a series. The Conveyor is a favourite amongst hire companies, with its lightweight aluminium frame it is portable and makes working on site far easier.

The material conveyors are ideal for excavation or renovation work. The machine moves with your workspace allowing you to spend more time on the job and less time ferrying back and forth. It's a real workhorse of a machine, designed to be used day in and day out it will soon become a trusted and vital member of your team.



| PRODUCT CODE | DESCRIPTION | LENGTH | BELT WIDTH | CAPACITY |
|--------------|-------------------|--------|------------|----------|
| HMC3.1M | Material Conveyor | 3.1m | 300mm | 60t p/h |
| HMC4.4M | Material Conveyor | 4.4m | 300mm | 60t p/h |
| HMC3.1MW | Material Conveyor | 3.1m | 450mm | 90t p/h |
| HMC4.4MW | Material Conveyor | 4.1m | 450mm | 90t p/h |

NIKO SCAFFOLDING RUNWAY SYSTEM

The Scaffolding Runway System is unique to Niko Ltd and provides a solution for lifting and moving loads throughout a scaffolding support structure.

| NIKO PROFILE | S.W.L. | TRACK SUPPORT CENTRES | MAX. CANTILEVER |
|--------------|--------|-----------------------|-----------------|
| 24,000 | 125kg | 1m | 0.35m |
| 25,000 | 250kg | 1.5m | 0.4m |
| 26,000 | 500kg | 1.5m | 0.5m |
| 27,000 | 1000kg | 1.5m | 0.5m |
| 27,000 | 1600kg | 1m | 0.3m |



- ▲ CLAMPS TO EXISTING SCAFFOLDING STRUCTURE
- ▲ LIFT AND MOVE LOADS UP TO 2000KG
- ▲ CANTILEVER OVER THE END OF THE SCAFFOLDING
- ▲ AVAILABLE IN STRAIGHT AND CURVED SECTIONS
- ▲ CHANGE DIRECTION WITH JUNCTION SWITCHES
- ▲ SUSPEND A BRIDGE FROM 2 RUNWAYS TO CREATE A CRANE SYSTEM
- ▲ SUPPLIED IN KIT FORM FOR EASE OF INSTALLATION, EXTENSION AND RELOCATION
- ▲ SOME COMPONENTS APPROVED TO EN795 FOR FALL ARREST

VACUUM GLASS LIFTER

Self-contained, dual circuit, battery-operated vacuum lifters with various lifting capacities.

Units are available to lift up to 250kg.

PRODUCT CODE

HVGL



CRANE SITE EQUIPMENT



BLOCK GRABS

Block grabs can be used to lift all standard brick and block packs and can be used along with cranes and forklift trucks.

We recommend use of a spillage net when using the block grabs.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|--------------|--------|
| HBG0.3T | Block Grab | 0.3t |
| HBG1.5TFP | Block Grab | 1.5t |
| HBG1.8TFP | Block Grab | 1.8t |
| HBG2TFP | Block Grab | 2t |
| HSN | Spillage Net | N/A |



MAN RIDING BASKET

1 MAN | 2 MAN | 4 MAN

| PRODUCT CODE | DESCRIPTION |
|--------------|-----------------------|
| HMB2 | 2 Man Basket |
| HMB4 | 4 Man Basket |
| HMBR1 | 1 Man Circular Basket |

- TO BE UTILISED WITH CRANES
- AVAILABLE IN 1, 2 OR 4 MAN SIZES
- MAN BASKETS FOR FORKLIFTS ARE ALSO AVAILABLE
- A SAFETY HARNESS WITH A SUITABLE LANYARD MUST BE WORN WHEN USING A MAN RIDING BASKET



GOODS CARRYING CAGE

A safe, convenient method of transporting materials to and from high or low level.

Sturdy construction with front gate for easy loading and 1m high full mesh for security. Fitted with four fully tested lifting lugs. Fork pockets are fitted as standard.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|--|--------|
| HGCC1.5T | Goods Carrying Cage - 1.25m x 1.25m x 1m | 1.5t |
| HGCC3T | Goods Carrying Cage - 2.5m x 1.25m x 1m | 3t |



SCAFFOLD LIFTING CAGE

Designed specifically for the scaffolding industry, the scaffold lifting cage can guarantee maximum safety while lifting bundles of scaffolding tubes of varying lengths.

- SAFFOLDING TUBES ARE SECURED USING RATCHET STRAPS, SUPPLIED WITH THE CAGE
- FITTED WITH 4 FULLY TESTED LIFTING LUGS
- 4 POCKETS ARE ALSO FITTED AS STANDARD AS WELL AS LOCKABLE ENDS
- CAGES ARE STACKABLE



| PRODUCT CODE | DESCRIPTION | S.W.L. | STANDARD LENGTH |
|--------------|-----------------------|--------|-----------------|
| HSLC1T | Scaffold Lifting Cage | 1t | 1.7m |
| HSLC1T2.6M | Scaffold Lifting Cage | 1t | 2.6m |
| HSLC1T5M | Scaffold Lifting Cage | 1t | 5m |
| HSLC1.5T3M | Scaffold Lifting Cage | 1.5t | 3m |

SITE STRETCHER CAGE

Site stretcher cages are a requirement and deemed the only suitable means of rescue for an injured or sick worker.

A must for certain work at height situations or when working in an excavation.

For use with a crane.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|---------------------|--------|
| HCSC2M | Site Stretcher Cage | 190kg |
| HBS | Stretcher | |





GAS BOTTLE LIFTING CAGE

Gas bottle lifting cages are designed to lift a number of gas bottles in a safe manner on site.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-------------------------|--------|
| HGBC350KG | Gas Bottle Lifting Cage | 350kg |
| HGBC530KG | Gas Bottle Lifting Cage | 530kg |

BOARD / PALLET FORKS

Board forks are used for lifting sheet materials on site.

They are designed primarily for the simple and safe lifting of plasterboard or composite timber board materials such as plywood sheets, although they can handle any similar sheet products.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|----------------------|--------|
| HCBL1.6T | Board / Pallet Forks | 1.6t |

These forks can be used to lift multiple sheets in the horizontal or vertical plane which provides a safe method for lifting these heavy sheets.

The benefit of these board forks are that they reduce the need for manual handling because they can be used with a crane, which means sheets can be transported in bulk.



CAGED BRICK FORKS

The caged crane forks have been designed for lifting and moving palletised loads of bricks, blocks and bagged of building material.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-------------------|--------|
| HCFC2T | Caged Brick Forks | 2t |



- ▲ SUPPLIED AS STANDARD WITH A SAFETY CAGE TO ENSURE THE LOAD DOES NOT MOVE DURING TRANSPORTATION
- ▲ APPLICATIONS INCLUDE MOVING SMALLER LOOSE ITEMS, SUCH AS TOOLS, BAGS OR WHEELBARROWS TO HIGH LEVELS WITH A CRANE ON A CONSTRUCTION SITE
- ▲ THE SAFETY CAGE HAS A SIMPLE, YET EFFECTIVE, C/W SELF BALANCING CRANE FORKS

CAR LIFTING NET

A unique way to safely lift vehicles. A great item to use at exhibition and shows.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-----------------|--------|
| HCARN | Car Lifting Net | 6t |



SELF-LEVELLING CRANE FORKS / PALLET FORKS

Crane forks allow you to safely and easily move palletised loads using a crane.

A net is provided with the forks to prevent accidental spillage.

We recommend use of a spillage net when using crane forks.



| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-------------------------------------|--------|
| HCF1.5T | Self Levelling Crane / Pallet Forks | 1.5t |
| HCF2T | Self Levelling Crane / Pallet Forks | 2t |
| HSN | Spillage Net | N/A |

SKIP LIFTING CRADLE

The skip lifting cradle provides a safer method of lifting a builder's skip with a crane and provides a balanced and supported option.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|---------------------|--------|
| HSLC12T | Skip Lifting Cradle | 12t |

- THESE CRADLES ALLOW FOR SKIPS TO BE LIFTED FROM THE BASE RATHER THAN USING THE LIFTING LUGS
- DESIGNED TO LIFT BOTH 6 AND 8-YARD BUILDER'S SKIPS
- FITTED WITH CAPTIVE LIFTING CHAIN SLINGS THAT CAN BE USED WITH A CRANE
- SUITED FOR RUGGED CONSTRUCTION ACTIVITIES



BOSUN'S CHAIR

The Bosun's Chair is a lifting accessory designed to offer a comfortable seat for extended sessions of work in a suspended position.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|---------------|--------|
| HBC | Bosun's Chair | 115kg |

- IT CAN BE USED IN A RANGE OF APPLICATIONS, FROM CONFINED SPACE AND MAINTENANCE WORK, TO PERSONAL RETRIEVAL AND RESCUE FUNCTIONS
- DUE TO THE COMFORT AND SUPPORT OFFERED BY THIS SEAT A USER CAN WORK MORE EFFICIENTLY FOR LONGER PERIODS WITHOUT TIRING OR SUFFERING NEGATIVE EFFECTS OF SUSPENSION IN A HARNESS ALONE
- IT IS IMPORTANT THAT THE USER STILL WEARS A HARNESS CONNECTED DIRECTLY TO PPE EQUIPMENT
- MUST BE USED IN CONJUNCTION WITH A FALL ARREST SYSTEM



CONCRETE, STONE & MUCK HANDLING



CONCRETE SKIPS

We have a range of skips in different sizes for use when pouring concrete.



GEARED CONCRETE SKIP

Designed for universal use, with a straight or lateral outlet and moveable flow control chute. Cylindrical-conical shape with cylindrical straight outlet, rugged heavy-duty design with geared operation of the patented discharge gate.

| PRODUCT CODE | DESCRIPTION | SIZE |
|--------------|-------------|---------|
| HGS500 | Geared | 500ltr |
| HGS1000 | Geared | 1000ltr |
| HGS1500 | Geared | 1500ltr |



LEVERED CONCRETE SKIP

Designed for universal use, with a straight or lateral outlet and moveable flow control chute. Cylindrical-conical shape with cylindrical straight outlet. Rugged heavy-duty design with lever operation of the patented discharge gate.

| PRODUCT CODE | DESCRIPTION | SIZE |
|--------------|-------------|---------|
| HCCS500 | Levered | 500ltr |
| HCCS1000 | Levered | 1000ltr |



COLUMN SKIP

Horizontal cylindrical-conical shape with straight outlet and hose coupling, rugged heavy-duty design with lever operation of the patented discharge gate, and lift beam.

| PRODUCT CODE | DESCRIPTION | SIZE |
|--------------|-------------|---------|
| HCCS500 | Column | 500ltr |
| HCCS1000 | Column | 1000ltr |
| HCCS1500 | Column | 1500ltr |

Hose available for sales only

SELF-DISCHARGE BOAT SKIP

With drop-down lift beam, hook ring and latch for automatic emptying of the skip without an assistant.

The drop-down hanger makes the skip particularly ideal for filling by small construction machines.

| PRODUCT CODE | DESCRIPTION | SIZE |
|--------------|--------------------------|---------|
| HMSB1T | Self-Discharge Boat Skip | 500ltr |
| HMSB2T | Self-Discharge Boat Skip | 1000ltr |
| HMSB3T | Self-Discharge Boat Skip | 1500ltr |
| HMSB4T | Self-Discharge Boat Skip | 2000ltr |



- ▲ IDEAL FOR GENERAL WASTE AND REMOVAL ON SITE
- ▲ AUTOMATIC EMPTYING DESIGN
- ▲ NO THIRD-PARTY ASSISTANCE REQUIRED

CIRCULAR MUCK TIPPING SKIP

With fold-down hanger and safety lock. When the safety lock is opened by hand the tub empties automatically in response to the centre of gravity of the hanger.

Traditional muck skips are used for removal of general muck and rubbish on site.

| PRODUCT CODE | DESCRIPTION | SIZE |
|--------------|----------------------------|---------|
| HMS500 | Circular Muck Tipping Skip | 500ltr |
| HMS1000 | Circular Muck Tipping Skip | 1000ltr |
| HMS1500 | Circular Muck Tipping Skip | 1500ltr |
| HMS2000 | Circular Muck Tipping Skip | 2000ltr |

FORK LIFT TRUCK TIPPING GRIPS AVAILABLE




CARGO NETS

Heavy duty Cargo / Lifting Nets are ideal for lifting and securing loads or several individual items, due to the versatile and balanced lifting design.

3m x 3m

5m x 5m

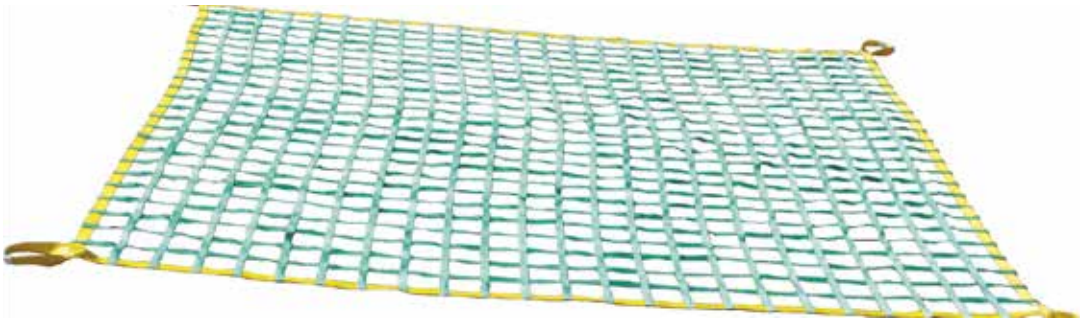

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-------------------|--------|
| HCN2T | Cargo Net 3m x 3m | 2t |
| HCN2T5 | Cargo Net 5m x 5m | 2t |

MECHANICAL BOULDER / ROCK GRAB

These easy to use grabs are specifically designed for lifting rocks, boulders and natural stones of varying weights, shapes and sizes.

| PRODUCT CODE | DESCRIPTION | SIZE | WEIGHT |
|--------------|---|--------|--------|
| HMBG | FVZ-UNI Mechanical Boulder / Rock Grab | 1500kg | 99kg |



- ▲ BY CHANGING THE CHAIN POSITION, THE CLAMP CAN BE LIFTED AFTER SETTING OF THE STONE
- ▲ AUTOMATICALLY ADJUST GRIPPING RANGE FROM 0MM TO A MAXIMUM OF 950MM
- ▲ COMES WITH LIFTING EYE FOR ATTACHING TO A CRANE HOOK

STONE VACUUM MAGNET

The battery-driven vacuum lifting device, easy to handle, robust, independent of main power supply. Flexible, fast and secure installation of primarily vacuum-dense elements, e.g. such as granite.

The vacuum magnet is ideal for use with crane or lifting machine to lift heavy stone or concrete slabs or blocks.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|---------------------|-------------|
| HM200 | Stone Vacuum Magnet | 200 / 400kg |

- ▲ CAN BE USED WITH ANY HOIST
- ▲ WITH INTEGRAL CHAIN-BOX AND LOAD-SECURING CHAIN
- ▲ INTEGRAL CHARGER SOCKET FOR CHARGING
- ▲ POWERED BY RECHARGEABLE, EXCHANGEABLE 12 V BATTERY
- ▲ POWER SAVING CONTROL SYSTEM ENSURES BATTERY LASTS FOR ONE WHOLE WORKING DAY



FLAG LAYING VACUUM HANDLES

Flexible and powerful hand operated laying device for dense products, such as granite or high quality concrete elements up to 150kg weight.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|------------------------------------|--------|
| HFLVH160 | VPH-100 Flag Laying Vacuum Handles | 100kg |
| HFLVH150 | VPH-150 Flag Laying Vacuum Handles | 150kg |



- ▶ POWERFUL BATTERY OPERATED UNITS
- ▶ IDEAL FOR PLACING HEAVY, LARGE ITEMS
- ▶ USE MANUALLY OR VIA A CENTRAL LIFTING EYE
- ▶ DIFFERENT SIZES AND PLATES AVAILABLE



KERB STONE LIFTING HANDLES

Especially suitable for handling concrete kerb stones.

The one-sided angular supports which are placed on the kerb stone already in place enable an extremely narrow joint.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|----------------------------|--------|
| HKLH40KG | Kerb Stone Lifting Handles | 40kg |



- GRIPS LONGITUDINALLY SO THAT IT CAN BE USED IN TIGHTEST SPACES
- NO DEFLECTION OF THE PLUMB LINE
- ALL MODELS ARE EQUIPPED WITH A LIFTING EYE
- S.W.L. WHEN LIFTED FROM LIFTING EYE IS 100KG

UNIVERSAL LIFTING HANDLES

A large adjustable opening range means the BVZ can be universally used for all gardening and landscaping-design products.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|---------------------------|--------|
| HULH40KG | Universal Lifting Handles | 40kg |



- REMOVABLE HANDLES
- EXCHANGEABLE RUBBER METAL BARS AS GRIPPING ELEMENTS
- PIN BOLTS TO ADJUST THE OPENING WIDTH

BLOCK PAVING EXTRACTOR

An essential tool for any contractor who lays paving blocks or carries out repairs to paved surfaces.

Adjustable to fit any size and shape of paver.



| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|------------------------|--------|
| HBPE20KG | Block Paving Extractor | 20kg |
| HPZSE70KG | Slab Extractor | 70kg |



- WITH LOCKING DEVICE!
- THE OPERATOR DOES NOT NEED TO CONTINUALLY SQUEEZE THE SZ-HANDLES TOGETHER. THE SPRING STEEL BLADES CAN BE DRIVEN INTO THE JOINTS OF EXISTING PAVEMENTS WITHOUT PROBLEMS BY THE COMBINATION HAMMER KH
- THE GRIPPING WIDTH CAN BE ADJUSTED WITHOUT TOOLS
- EASILY EXCHANGEABLE, HIGH QUALITY PROFILED SPRING STEEL BLADES
- DURABLE SURFACE PROTECTION BY GALVANIZING

PIPE LAYING HOOKS

This hook allows the safe lifting and placing of pipes horizontally. A fitted safety chain ensures the load cannot slip.

Ensures greater safety and saves time when laying pipes.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|------------------|--------|
| HPLH3T | Pipe Laying Hook | 3t |



- FOR PIPES UP TO 1M LENGTH
- EYELET FOR ATTACHING TO CRANE HOOK
- SAFETY CHAIN
- HANDLE FOR SAFER INSERTION INTO THE PIPE

PIPE LIFTING HOOKS

Used in pairs, these hooks fit into the ends of pipes.

This allows the pipes to be lifted with a 2 leg chain sling.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-------------------|--------|
| HPLH2T | Pipe Lifting Hook | 2t |
| HPLH4T | Pipe Lifting Hook | 4t |
| HPLH6T | Pipe Lifting Hook | 6t |
| HPLH20T | Pipe Lifting Hook | 20t |



- ▲ TO BE USED IN PAIRS
- ▲ HOOKS TO FIT INTO THE END OF PIPES
- ▲ LIFTED WITH A 2 LEG CHAINSLING

VACUUM KERB & STONE LAYER

FORK MOUNTED / PETROL

- 4M LONG SWING ARM
- SCAN SLEW THROUGH 270°
- ABLE TO LIFT UP TO 150KG
- SIMPLE ONE MAN OPERATION
- LAY 300M OF KERB STONES IN ONE DAY

| PRODUCT CODE | DESCRIPTION | WEIGHT |
|--------------|---------------------------|--------|
| HFMKSL | Vacuum Kerb & Stone Layer | 150kg |



MANHOLE COVER LIFTER

Our two or four key manhole cover lifter makes easy work for lifting manhole covers. The built-in hydraulic cylinders make this sometimes arduous task a one-man operation.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|----------------------------|--------|
| HMCL1.5T | 2 Key Manhole Cover Lifter | 1.5t |
| HMCL3T | 4 Key Manhole Cover Lifter | 3t |



VACUUM KERB & STONE LAYER

FOR EXCAVATOR OR CRANE / PETROL

- ▲ LIFT BOTH STONE OR STEEL PRODUCTS
- ▲ UTILISE DIFFERENT HEADS AND PLATES
- ▲ SUSPEND FROM EXCAVATOR OR CRANE
- ▲ IDEAL FOR REPETITIVE STONE LAYING
- ▲ USE FOR SLABBING AND KERBING

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|---------------------------|--------|
| HVKL1T | Vacuum Kerb & Stone Layer | 1t |



LIFTING PINS FOR MANHOLES

**Specially designed pins for the lifting of man-hole pipes.
25mm, 32mm, 35mm or 38mm diameters are available.**

The safe way for lifting, positioning and handling of manhole pipes and chambers.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|----------------------------------|--------|
| HMLP0.75T | Lifting Pins for Manholes (each) | 0.75t |
| HMLP1T | Lifting Pins for Manholes (each) | 1t |
| HMLP1.5T | Lifting Pins for Manholes (each) | 1.5t |
| HMLP2T | Lifting Pins for Manholes (each) | 2t |



- DESIGNED SPECIFICALLY TO SPEED UP LIFTING OPERATIONS WHERE MANHOLE PIPES ARE INVOLVED
- SAFE AND SIMPLE TO USE
- NO THREADS NEEDING PROTECTION OR NUTS TO SAFE GUARD
- MUST NOT BE USED SINGULARLY

MANHOLE RING CLAMP

These clamps are designed for moving, transporting and laying heavy concrete manhole rings and cones.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|--------------------|--------|
| HMRC0.8T | Manhole Ring Clamp | 0.8t |
| HMRC1.5T | Manhole Ring Clamp | 1.5t |
| HMRC3T | Manhole Ring Clamp | 3t |



- ESPECIALLY EASY HANDLING AND LIGHTWEIGHT
- AUTOMATICALLY ADJUSTABLE CLAMPING RANGE OF THE CLAWS TO THE THICKNESS OF THE PIPE WALLS


MANHOLE RING LIFTER

The ring lifter allows rigid grip on the inside of concrete items such as shaft rings, cones, bases and covers.

This universal manhole and cone clamp SVZ-uni enormously rationalizes transport and installation of manhole elements.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|---------------------|--------|
| HMRL2.5T | Manhole Ring Lifter | 2.5t |

- ESPECIALLY SUITABLE FOR MANHOLE BASERS, RINGS AND CONES
- AN ADDITIONAL OPERATOR IS NOT NECESSARY AS THE DRIVER OF THE LIFTING MACHINE "SWITCHES" THE SVZ-UNI FROM GRIPPING TO RELEASING BY A SLIGHT MOVEMENT OF THE LIFTING HOOK
- THE SETTINGS TO THE REQUIRED DIAMETERS OF THE PRODUCTS IS DONE VERY QUICKLY THROUGH PLUG BOLTS. A REARRANGEMENT OF THE SETTINGS IS NOT NECESSARY WHEN HANDLING MANHOLE RINGS AND CONES, AS THE SVZ-UNI HAS GOT TWO GRIPPING LEVELS
- EFFICIENT AND ECONOMIC HANDLING OF ALL KINDS OF MANHOLE ELEMENTS

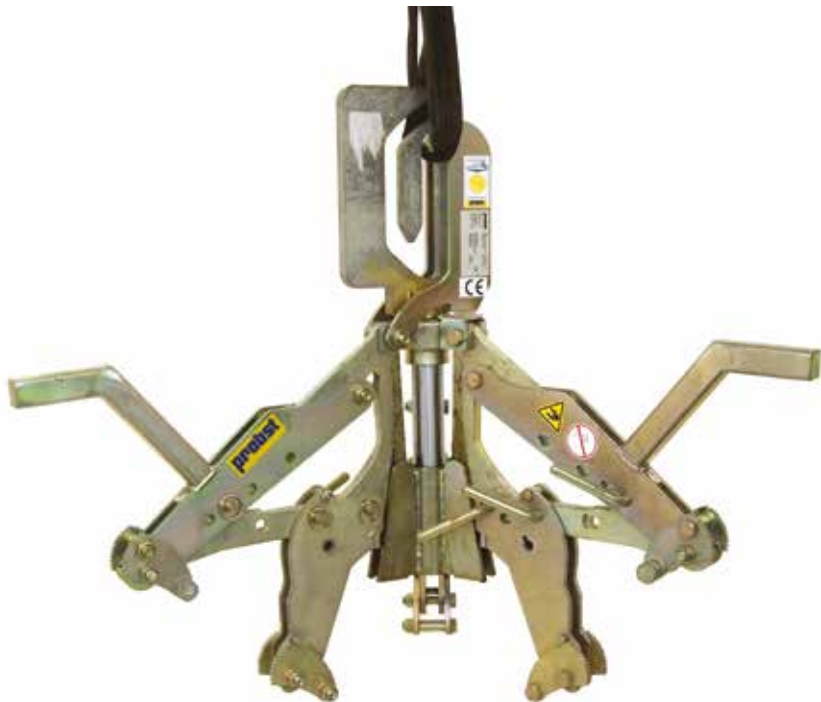

PREFABRICATED CONCRETE GRAB

Suitable for handling concrete components, prefabricated wall units, steps, kerb stones, natural stones and more.



| PRODUCT CODE | DESCRIPTION | GRIPPING RANGE (MM) | INSIDE HEIGHT (MM) | GRIPPER LENGTH (MM) | S.W.L. |
|--------------|-------------|---------------------|--------------------|---------------------|---------|
| HCKG900KG | FTZ-1 | 50 – 520 | 170 | 420 | 900kg |
| HUKSLC1.5T | FTZ-uni 15 | 0 - 750 | 255 | 420 | 1,500kg |
| HCBG4TFP | FTZ-uni 40 | 0 – 850 | 200 | 720 | 4,000kg |

CONCRETE KERB GRAB

Adjustable grabs for use with a crane or other lifting machine.

Suitable for handling steps, kerb stones, L-stones and more.
Easily adjustable opening width by means of spring loaded bolt.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|--------------------|--------|
| HCKG250KG | Concrete Kerb Grab | 250kg |
| HCKG500KG | Concrete Kerb Grab | 500kg |
| HCKG600KG | Concrete Kerb Grab | 600kg |




KERB STONE CLAMP

Fully mechanical operation for use with any wheel loader, excavator or any other carrier.

| PRODUCT CODE | DESCRIPTION | GRIPPING RANGE (MM) | S.W.L. |
|--------------|---------------------------|---------------------|--------|
| HVZ-M0.2T | VZ-M UNI Kerb Stone Clamp | 900 - 1065 | 300kg |

- ▲ LIFTING EYE FOR ATTACHING TO CRANE HOOK
- ▲ HANDLES FOR OPTIMAL GUIDANCE OF THE CLAMP
- ▲ AUTOMATIC RELEASE FOR THE FULLY AUTOMATIC SWITCH OVER 'FULL' TO 'EMPTY'

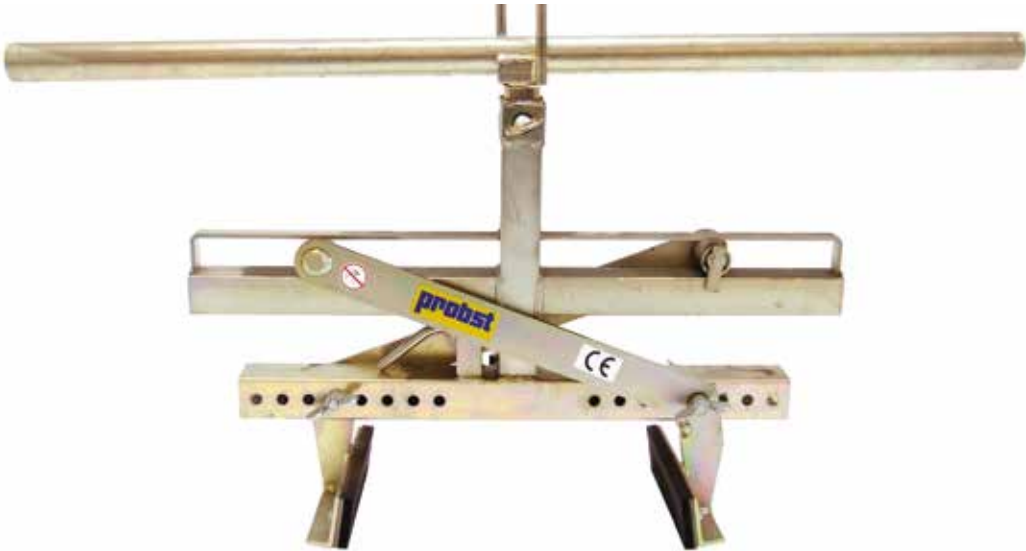

CONCRETE HIGHWAY DIVIDER CLAMP

With this mechanical grab, barrier walls can be gripped safely without leaving any marks on the concrete elements.

Even densely stacked asymmetrical elements can be lifted and installed easily, due to the slim design of gripper arms. Thus, more barrier elements can be loaded and transported on the truck, which results in a considerable reduction in costs!

| PRODUCT CODE | DESCRIPTION | GRIPPING RANGE (MM) | S.W.L. |
|--------------|-------------|---------------------|--------|
| HDBG | BSZ-KH-4.5 | 150 - 210 | 4.5t |
| HDBG6T | BSZ-KH-6.0 | 150-210 | 6t |







FORKLIFT TRUCK ACCESSORIES



FORKLIFT TELESCOPIC JIB

The extending jib allows the movement of long and awkward loads from inaccessible locations with up to 9 different lifting positions and with the added benefit of two hooks and shackles so as to ‘cradle’ your load.

| PRODUCT CODE | S.W.L. |
|--------------|--------|
| HTJ1.1T | 1t |
| HTJ2.5T | 2.5t |
| HTJ3T | 3t |
| HTJ4T | 4t |
| HTJ5T | 5t |

- 
 MULTI HOOK POSITIONING FROM 1000-3000 LOAD CENTRES
- 
 SUPPLIED COMPLETE WITH 2 NO SWIVEL HOOKS AND BOW SHACKLES
- 
 MAXIMUM FORK SECTION 150 X 50 MM AT 435 MM CENTRES
- 
 ZINC PLATED HEEL PINS FOR SAFE ATTACHMENT TO TRUCK



FORKLIFT HOOK ATTACHMENT

Fork Mounted Hooks provide an economical and safe method of converting a forklift truck into a mini mobile crane.

Multiple lifting positions can be achieved along the fork blade.

| PRODUCT CODE | S.W.L. |
|--------------|--------|
| HFLHA2T | 2t |
| HFLHA3T | 3t |
| HFLHA4T | 4t |
| HFLHA5T | 5t |
| HTJ5T | 5t |



- ▲ TWO FIXED LIFTING POINTS ALONG THE FORK BLADE
- ▲ SUPPLIED COMPLETE WITH SINGLE SWIVEL HOOK AND BOW SHACKLES
- ▲ FOUR WAY POCKET ENTRY FOR EASE OF STORAGE
- ▲ MAXIMUM FORK SECTION 150 X 50 MM AT 481 MM CENTRES
- ▲ ZINC PLATED HEEL PINS FOR SAFE ATTACHMENT TO TRUCK

FORKLIFT MAN BASKET

Designed to carry personnel while safely working at height, for use with forklift truck or crane.

Fitted as standard with practical tool tray, four crane lugs (no chain) and entrance door on side.

| PRODUCT CODE | S.W.L. |
|--------------|--------|
| HFLMB1M | 1 Man |
| HFLMB2M | 2 Man |



FORKLIFT TRUCK TIPPING SKIP

Designed to simplify the holding, movement and disposal of material in confined areas with the unique '4 way entry' base.





The skip is supplied as manual operation as standard.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|------------------|---------|
| HFLTS300 | FLT Tipping Skip | 300ltr |
| HFLTS500 | FLT Tipping Skip | 500ltr |
| HFLTS1.5T | FLT Tipping Skip | 750ltr |
| HFLRS2.4T | FLT Tipping Skip | 1200ltr |



- ▲ LOW LOADING HEIGHT
- ▲ 4 WAY FORK POCKET ENTRY
- ▲ SECONDARY LOCKING MECHANISM TO PREVENT ACCIDENTAL DISCHARGE
- ▲ MANUAL HANDLE OVERRIDE
- ▲ MAXIMUM FORK SECTION 150 X 50 MM AT 675 MM CENTRES
- ▲ ZINC PLATED HEEL PINS FOR SAFE ATTACHMENT TO TRUCK

FORKLIFT TRUCK EXTENSION FORKS

- 
 SITS OVER TRUCK'S OWN FORKS
- 
 ALLOWS UPLIFT OF BULKIER LOADS
- 
 MAXIMUM S.W.L. OF 1 TONNE
- 
 LENGTH UP TO 2.44M

| PRODUCT CODE | DESCRIPTION |
|--------------|---------------------------|
| HFLEXT1.8M | FLT Extension Forks 1.8m |
| HFLEXT2.3M | FLT Extension Forks 2.3m |
| HFLEXT2.44M | FLT Extension Forks 2.44m |



HEAVY DUTY TOWABLE SITE BOGEY

These heavy duty bogies are ideal for the movement of heavy items around site.

Designed to be pulled by a forklift truck, their large bed measurements make them an excellent addition to any industrial site.

| PRODUCT CODE | DESCRIPTION | S.W.L. | BED DIMENSIONS |
|--------------|-------------|--------|----------------|
| HTSB10T | Site Bogey | 10t | 3.6m x 2m |
| HTSB20T- | Site Bogey | 20t | 3.6m x 2m |





STEELWISE
FABRICATION & ENGINEERING

VERSATILE & BESPOKE

In the unlikely event we can't supply the lifting equipment you need, we'll build it, using our very own fabrication division, Steelwise.

CALL **01772 699888**

www.liftingprojects.com

 **SOLIDWORKS**

TRUCKS & TROLLEYS



PALLET TRUCKS

Pallet trucks are available in standard and wide.

| PRODUCT CODE | DESCRIPTION | S.W.L. | FORK WIDTH | FORK LENGTH | H.O.L. |
|--------------|-----------------------|--------|------------|-------------|--------|
| HSPT2.5T | Standard Pallet Truck | 2.5t | 540mm | 1150mm | 150mm |
| HWPT2.5T | Wide Pallet Truck | 2.5t | 685mm | 1150mm | 200mm |



LONG NOSE PALLET TRUCKS

| PRODUCT CODE | DESCRIPTION | S.W.L. | FORK WIDTH | FORK LENGTH | H.O.L. |
|--------------|------------------------|--------|------------|-------------|--------|
| HLNPT1T | Long Nose Pallet Truck | 1t | 540mm | 1500mm | 200mm |
| HLNPT1.5T | Long Nose Pallet Truck | 1.5t | 550mm | 2000mm | 165mm |
| HLNP2 | Long Nose Pallet Truck | 2t | 160mm | 2000mm | 200mm |



- ▲ FIRST CLASS MANOEUVRABILITY
- ▲ COMFORTABLE AND ERGONOMIC HANDLE DESIGN
- ▲ 210° ROTATION

HYDRAULIC MINI-LIFTER

With fixed platform, this foot operated hydraulic lift has a simple, sensitive hand-operated lowering mechanism.

Polyurethane steering castors fitted with parking brakes and wheel guards. For light duty work where loads exceed the manual handling directive but do not demand a heavy-duty stacker.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-----------------------|--------|
| HMHLT400KG | Hydraulic Mini-Lifter | 400kg |



- ▲ SMOOTH OPERATING FOOT PUMP WITH POSITIVE LIFTING
- ▲ FITTED WITH PRESSURE/OVERLOAD VALVE FOR ADDED SAFETY
- ▲ FIXED PLATFORM
- ▲ SMOOTH RUNNING BRAKED STEER WHEELS

HIGH LIFT PALLET TRUCKS

The high lift pallet truck (also sometimes referred to as a ‘Hi-lifter truck’ or ‘Scissor Lift Pallet Truck’) is designed to eliminate repetitive back strain when loading or offloading pallets by hand.

The high lift pallet truck has a scissor action to lift pallets to a working height of 800mm. Our scissor lift pallet trucks conform to the latest applicable health and safety regulations and can help to reduce the chances of a back strain or injury.



- ▲ AUTOMATICALLY BRAKED WHEN RAISED ABOVE 400MM
- ▲ THREE POSITION CONTROL LEVER
- ▲ AUTOMATIC DESCENDING SPEED CONTROL
- ▲ QUICK LIFT AS STANDARD ON MANUAL MODELS

| PRODUCT CODE | DESCRIPTION | S.W.L. | FORK WIDTH | FORK LENGTH | H.O.L. |
|--------------|------------------------|--------|------------|-------------|--------|
| HHLPT1T | High Lift Pallet Truck | 1t | 540mm | 1170mm | 800mm |

WEIGHING PALLET TRUCK

If you need to weigh a pallet, stillage, crate or similar receptacle, you can use a weighing hand pallet truck.

These pallet trucks have a built in scale typically set to 2000kg. If your application requires it we can re-calibrate the pallet trucks to lower capacities which gives higher accuracy. Weighing pallet trucks are often also used as portable scales so you do not have to move the load.

| PRODUCT CODE | DESCRIPTION | S.W.L. | FORK WIDTH | H.O.L. |
|--------------|-----------------------|--------|------------|--------|
| HWPT2T | Weighing Pallet Truck | 2t | 560mm | 110mm |



ELECTRIC POWERED PALLET TRUCKS

The electric pallet truck meets the needs of a vast number of applications guaranteeing high performance, even during the heaviest operations.

Ideal for workshops and sites with smooth surfaces.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|----------------------------------|--------|
| HPPT1T | Electric Powered Pallet Truck | 1t |
| HPPT1.6T | Electric Powered Pallet Truck | 1.6t |
| HPPT2T | Electric Powered Pallet Truck | 2t |
| HPPT3T | Electric (Stand On) Pallet Truck | 3t |

- ▲ 110V AND 240V OPTIONS
- ▲ STANDARD FORKS – 1150 MM X 550MM
- ▲ EASE OF USE, INCREASED PRODUCTIVITY



POWERED STACKER TRUCK

Compact sized stackers are the ideal solution to work in confined spaces and are both powerful and reliable.

Ideal for lifting and moving pallets in factories and warehouses on smooth surfaces.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-----------------------------------|--------|
| HGX12 | Powered Stacker Truck 3.5m H.O.L. | 1.2t |
| HLX14 | Powered Stacker Truck 4.5m H.O.L. | 1.4t |

- 110V POWER SUPPLY
- POWERED DRIVE AND LIFTING
- VARIOUS HEIGHT OF LIFT OPTIONS AVAILABLE
- IDEAL SOLUTION WHERE A FORK LIFT TRUCK CANNOT BE USED



| POWERED STACKERS | S.W.L. | REDUCED S.W.L. | H.O.L. | MIN. HEIGHT | WEIGHT |
|---------------------|--------|--|--------|-------------|--------|
| GX12/35 EVO | 1.2t | 600KG @ 2.5M | 3.5m | 2.25m | 618kg |
| LX14/45 (triplex) | 1.4t | 1400kg @3.3m 1200kg @3.6m 1000kg @ 4m 800kg @4.5m | 4.5m | 2.08m | 1190kg |

POWER PUSHER

The Power Pusher is a versatile pedestrian operated, electric tug / utility vehicle used to move, push, pull, steer and manoeuvre industrial loads.

The Power Pusher is a cost-effective alternative to a forklift truck or other ride-on vehicle and is significantly safer and quicker than having employees attempt to manually move such heavy loads.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|--------------|--------|
| HPP5100N | Power Pusher | 5100N |



ALL TERRAIN PALLET TRUCK

An ideal means of transporting palletized goods on site.

Large rubber wheels assist movement over rough or uneven terrain.
The load is lifted by a hydraulic ram as per a regular pallet truck.

| PRODUCT CODE | DESCRIPTION | S.W.L. | MAX. PALLET WIDTH |
|--------------|--------------------------|--------|-------------------|
| HATPT1.2T | All Terrain Pallet Truck | 1.2t | 1800mm |
| HATPT1.5T | All Terrain Pallet Truck | 1.5t | 1800mm |



BOARD TROLLEY

The panel trolley is an ideal product for transporting wallboards, MDF sheets and other difficult to carry panels around site.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|------------------------|--------|
| HBT2W | Board Trolley 2 Wheels | 100kg |
| HBT4W200KG | Board Trolley 4 Wheels | 200kg |
| HBT4W | Board Trolley 4 Wheels | 350kg |



SACK TRUCK - SOLID WHEELS

An ideal means of transporting palletted goods on site.

Large rubber wheels assist movement over rough or uneven terrain. The load is lifted by a hydraulic ram as per a regular pallet truck.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|---------------------------|--------|
| HST200KG | Sack Truck - Solid Wheels | 200kg |



PIPE BOGEY

Allows you to move pipework effortlessly and easily around site.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-------------|--------|
| HPB125KG | Pipe Bogey | 125kg |
| HPB500KG | Pipe Bogey | 500kg |



STAIR CLIMBER

POWERED OR MANUAL

Ideal for moving heavy objects up and down stairs.

Powered stair climbers run on rechargeable batteries.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-----------------------|--------|
| HSCM40KG | Manual Stair Climber | 40kg |
| HSCP190KG | Powered Stair Climber | 190kg |
| HSCP454KG | Powered Stair Climber | 454kg |
| HSCP680KG | Powered Stair Climber | 680kg |



SKOOTS FURNITURE MOVER



- ▲ DESIGNED FOR LIFTING AND MOVING LARGE HEAVY OBJECTS
- ▲ IDEAL FOR MOVING SAFES, VENDING MACHINES AND DISPLAY CABINETS
- ▲ LIFTED HYDRAULICALLY
- ▲ HELD IN PLACE WITH NYLON RATCHET STRAPS
- ▲ FITTED WITH WHEELS THAT SLEW 360°

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|------------------------|--------|
| HSKT2000KG | Skoots Furniture Mover | 2000kg |

SCISSOR LIFT TABLE

The scissor lift table can be raised or lowered to enable work to be carried out at an appropriate height.

They are also fitted with wheels, allowing them to be moved under load.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|--------------------|--------|
| HHSLM300KG | Scissor Lift Table | 300kg |
| HHSLM500KG | Scissor Lift Table | 500kg |
| HHSLM1T | Scissor Lift Table | 1000kg |



TURNTABLE SITE TRUCK

Turntable trucks can be used for moving a large quantity of small objects or larger bulkier loads.

| PRODUCT CODE | DESCRIPTION | S.W.L. | BED DIMENSIONS |
|--------------|----------------------|--------|-----------------|
| HTT500KG | Turntable Site Truck | 500kg | 1220mm x 610mm |
| HTT1T | Turntable Site Truck | 1000kg | 1525mm x 760mm |
| HTT2T | Turntable Site Truck | 2000kg | 2000mm x 1000mm |

- ▲ TRUCKS ARE FITTED WITH EITHER SOLID OR PNEUMATIC TYRES
- ▲ IDEAL FOR VARIOUS TERRAINS
- ▲ VARIOUS BED DIMENSIONS ARE AVAILABLE





**LIFTING GEAR
TRAINING UK**



TAILORED TO YOUR NEEDS

We offer a full range of training and familiarisation programmes with flexible delivery, either based at LGUK or your premises.

CALL **0330 332 2650**

www.lg-uk.com

JACKS & SKATES



HYDRAULIC CYLINDERS

Very compact cylinders for all lifting, positioning and basic maintenance applications.

Different closed heights and strokes are available upon request.
Low profile, low height, pad jacks and hollow cylinders are available.

| PRODUCT CODE | DESCRIPTION | S.W.L. | CLOSED HEIGHT | MAX. STROKE |
|--------------|--------------------|--------|------------------------------|-------------|
| HHC5T | Hydraulic Cylinder | 5t | 92mm | 25mm |
| HHC10T | Hydraulic Cylinder | 10t | 86mm | 35mm |
| HHC25T | Hydraulic Cylinder | 23t | 150mm | 50mm |
| HHC50T | Hydraulic Cylinder | 50t | 122mm | 60mm |
| HHC100T | Hydraulic Cylinder | 100t | 191mm | 100mm |
| HHC250T | Hydraulic Cylinder | 250t | Please call for more details | |
| HHC700T | Hydraulic Cylinder | 700t | | |



DON'T FORGET TO ORDER YOUR HYDRAULIC PUMP AND HOSES

LIGHTWEIGHT ALUMINIUM JACKS

WITH OR WITHOUT CLAW ATTACHMENT

All of our aluminium jacks can be used as either a conventional cylinder or alternatively as a claw jack for low height situations.

PLEASE NOTE: The claw attachment is only capable of lifting 40% of the jack's capacity.

| PRODUCT CODE | DESCRIPTION | S.W.L. | CLOSED HEIGHT | MAX. STROKE | MIN. TOE HEIGHT |
|--------------|----------------|--------|---------------|-------------|-----------------|
| HTJ6T | Aluminium Jack | 6.5t | 131mm | 75mm | N/A |
| HTJ20T | Aluminium Jack | 20t | 280mm | 152mm | 67mm |
| HTJ30T | Aluminium Jack | 30t | 284mm | 152mm | 72mm |
| HTJ60T | Aluminium Jack | 60t | 327mm | 152mm | 72mm |



STEEL TOE JACKS

Designed for ultra low clearance under loads (41mm), these jacks can lift up to 5 tonnes on the toe or can be used as a conventional jack, utilising the unit's head.

| PRODUCT CODE | DESCRIPTION | S.W.L. | CLOSED HEIGHT | MAX. STROKE | MIN. TOE HEIGHT |
|--------------|--------------------------|--------|---------------|-------------|-----------------|
| HSTJ5T | Hydraulic Steel Toe Jack | 5T | 327mm | 230mm | 41mm |



HYDRAULIC JACK & CYLINDER ACCESSORIES

A range of accessories for use with hydraulic jacks and cylinders.
Can be hired for use with your own equipment if required.

| PRODUCT CODE | DESCRIPTION | OPERATING PRESSURE |
|--------------|---------------------|--------------------|
| HHP | Hydraulic Hand Pump | 700 bar |
| HEMP | Electric Pump | 700 bar |
| H4WM | 4 Way Manifold | 700 bar |
| H2WM | 2 Way Manifold | 700 bar |
| HPG | Pressure Gauge | 0 - 1000 Range |
| HHHX3M | Hose Extension 3m | 700 bar |



ELECTRIC
PUMP



HYDRAULIC
HOSE



PRESSURE
GAUGE



4 WAY
MANIFOLD



HYDRAULIC
HAND PUMP

BOTTLE JACKS

These compact self-contained units are perfect for general operations such as lifting, pushing, moving and supporting all kinds of loads.

They can be used either in the vertical or horizontal position.

PLEASE NOTE: Bottle jacks are fitted with a screw out manual extension to extend the height lift.

| PRODUCT CODE | DESCRIPTION | S.W.L. | CLOSED HEIGHT | MAX. STROKE |
|--------------|-------------|--------|---------------|-------------|
| HBJCK6T | Bottle Jack | 6t | 219mm | 130mm |
| HBJCK12T | Bottle Jack | 12t | 240mm | 153mm |
| HBJCK20T | Bottle Jack | 20t | 240mm | 153mm |



RATCHET JACKS

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|--------------|--------|
| HRJ5T | Ratchet Jack | 5t |
| HRJ10T | Ratchet Jack | 10t |
| HRJ20T | Ratchet Jack | 20t |

- ▲ ROBUST AND SELF-CONTAINED
- ▲ BUILT-IN CARRY HANDLE
- ▲ TO BE USED ON THE HEAD OR TOE OF THE JACK



HYDRAULIC TROLLEY JACK

These Jacks are ideal for lifting cars, vans and light commercial vehicles and are solidly constructed and very robust.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|------------------------|--------|
| HHTJ3T | Hydraulic Trolley Jack | 3t |
| HHTJ5T | Hydraulic Trolley Jack | 10t |



HYDRAULIC WEDGES - SEPARATING & LIFTING

Wedges can be inserted into tight spaces such as between machinery or prising apart.

They are available in either a self-contained format or with separate hydraulics.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|------------------|--------|
| HSW1T | Separating Wedge | 1t |
| HSW10T | Separating Wedge | 10t |
| HSW20T | Separating Wedge | 20t |
| HLW10T | Lifting Wedge | 10t |
| HLW20T | Lifting Wedge | 20t |



HYDRAULIC PULLER KITS

These puller units are used for removing and installing tight fitting parts such as gears, bearings, shafts etc.

A hydraulic ram applies pressure to remove / install the seized / stuck component.

Both self contained and separate hydraulic versions are available.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|----------------------|--------|
| HPK6T | Hydraulic Puller Kit | 6t |
| HPK10T | Hydraulic Puller Kit | 10t |
| HPK20T | Hydraulic Puller Kit | 20t |
| HPK30T | Hydraulic Puller Kit | 30t |



STEERABLE NYLON LOAD MOVING SKATES

Our skate sets comprise of a steerable front section and a pair of adjustable rear trolleys. They are ideal for moving and positioning heavy loads.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-------------------------------|--------|
| HNS1.5T | Steerable Nylon Moving Skates | 1.5t |
| HNS6T | Steerable Nylon Moving Skates | 6t |
| HNS8T | Steerable Nylon Moving Skates | 8t |
| HNS10T | Steerable Nylon Moving Skates | 10t |
| HNS12T | Steerable Nylon Moving Skates | 12t |
| HNS20T | Steerable Nylon Moving Skates | 20t |
| HNS30T | Steerable Nylon Moving Skates | 30t |
| HNS60T | Steerable Nylon Moving Skates | 60t |
| HNS80T | Steerable Nylon Moving Skates | 80t |
| HNS100T | Steerable Nylon Moving Skates | 100t |



TECHNICAL DATA MODEL SX AND MODEL SX AND MODELS

| MODEL | EAN-NO. 4025092* | CAPACITY | OVERALL HEIGHT | NUMBER OF ROLLERS | ROLLER DIAMETER | COLOUR OF ROLLERS | WEIGHT |
|-------|---------------------|----------|-------------------|----------------------|--------------------|----------------------|--------|
| SX-10 | *158503 | 10 | 102 | 16 | 82 | Black | 54 |
| SX-20 | *158541 | 20 | 102 | 32 | 82 | Black | 76 |
| SX-30 | *158589 | 30 | 110 | 48 | 82 | Black | 136 |
| S-60 | *161930 | 60 | 170 | 48 | 115 | Black | 302 |
| S-100 | *158664 | 100 | 210 | 48 | 150 | Black | 525 |

STEEL MACHINE SKATES

The steel machine skates provide an economic and robust solution to a number of load moving and placing problems.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|----------------------|--------|
| HSMS15t | Steel Machine Skates | 15t |
| HSMS20t | Steel Machine Skates | 20t |
| HSMS30t | Steel Machine Skates | 30t |
| HSMS60t | Steel Machine Skates | 60t |
| HSMS100t | Steel Machine Skates | 100t |



CABLE DRUM SCREW JACKS

Our skate sets comprise of a steerable front section and a pair of adjustable rear trolleys. They are ideal for moving and positioning heavy loads.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|------------------------|--------|
| HCDJ3T | Cable Drum Screw Jacks | 3t |
| HCDJ5T | Cable Drum Screw Jacks | 5t |
| HCDJ6T | Cable Drum Screw Jacks | 6t |
| HCDJ8T | Cable Drum Screw Jacks | 8t |
| HCDJLB3T | Load Bar | 3t |
| HCFJLB3T | Load Bar | 5t |
| HCDJLB6T | Load Bar | 6t |
| HCDJLB8T | Load Bar | 8t |



ROLLER CROW BAR

Roller pinch bar is an ideal companion to the professional load mover.

Its compact and lightweight design makes it simple and very easy to use and transport. With its low toe plate height, it is able to get into the tightest gaps.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-----------------|--------|
| HRCB1.5T | Roller Crow Bar | 1.5t |
| HRCB5T | Roller Crow Bar | 5t |



| TECHNICAL DATA MODEL RPB | | | | | |
|--------------------------|----------|-------------|------------|--------------|--------|
| MODEL | CAPACITY | LIFT HEIGHT | O/A LENGTH | ROLLER (DXW) | WEIGHT |
| RPB15 | 1500kg | 145mm | 2000mm | 75mmx55mm | 16.5kg |
| rpb50 | 5000kg | 145mm | 2000mm | 70mmx54mm | 32kg |

AERO GO JACKS

| PRODUCT CODE | DESCRIPTION | S.W.L. | FLAT HEIGHT |
|--------------|--------------|--------|-------------|
| HAGJ45.4T | Aero Go Jack | 45.4t | 37mm |

- ▲ SLIDE UNDER INACCESSIBLE ITEMS
- ▲ EASY TO HANDLE AND TRANSPORT
- ▲ QUICKLY INFLATES



RATCHET CABIN JACKS / FARM JACKS

Our cabin jacks are lightweight and can be used easily to lower or raise the heights of cabins and other similar items.

| PRODUCT CODE | DESCRIPTION | S.W.L. | MAX. LIFT HEIGHTS |
|--------------|---------------------------------|--------|-------------------|
| HCJ2113KG | Ratchet Cabin Jack / Farm Jacks | 2113kg | 1263mm |



AIR SKATES

These low friction, low profile skates work with compressed air to easily float loads across finished, easily damaged, floor surfaces.

6 plates - S.W.L. 10.8 tonne each. Compressors are available upon request.

| PRODUCT CODE | DESCRIPTION | S.W.L. | NUMBER OF SKATES | OPERATING PRESSURE |
|--------------|-------------|--------|------------------|--------------------|
| HAS | Air Skates | 65.3t | 6 | 3.5 bar |



TESTING & LOAD MEASUREMENT



DIGITAL LOAD INDICATORS

The Digital Load Indicator can be used to ascertain unknown item weights and aid safer lifting.

A remote control can also be supplied that enables the user to monitor the operation from a safe distance.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|------------------------|--------|
| HDLI1T | Digital Load Indicator | 1t |
| HDLI2.5T | Digital Load Indicator | 2.5t |
| HDLI5T | Digital Load Indicator | 5t |
| HDLI10T | Digital Load Indicator | 10t |
| HDLI20T | Digital Load Indicator | 20t |
| HDLI25T | Digital Load Indicator | 25t |
| HDLI50T | Digital Load Indicator | 50t |
| HDLI75T | Digital Load Indicator | 75t |
| HDLI100T | Digital Load Indicator | 100t |
| HDLIRC | Remote Control | n/a |
| HDLIPC | PC Software & Leads | n/a |



- ▲ SHACKLES ARE REQUIRED FOR USE WITH LOAD LINKS
- ▲ DOWNLOAD RESULTS TO A PC, USING ADVANCED SOFTWARE
- ▲ INDICATORS OVER 100T ARE AVAILABLE



LOW HEADROOM TEST WEIGHTS

Low Headroom Test Weights and rigs available from 500kg in various increments and are supplied on an easy to use pole.

| PRODUCT CODE | DESCRIPTION |
|----------------------------------|---------------------------------|
| HCWP500KG | Cheese Weight Pole |
| HCW250KG | 250kg Cheese Weight (per 250kg) |
| HCW500KG | 500kg Cheese Weight (per 500kg) |
| HCW1T | 1t Cheese Weight (per 1t) |
| HCW2.5T | 2.5t Cheese Weight (per 2.5t) |
| Max. weight on cheeseweight 3.5t | |



HAND WEIGHTS & CRADLES

Hand weights are ideal for performing small load tests or for providing a ballast for a range of applications.

| PRODUCT CODE | DESCRIPTION |
|--------------|-------------------------------|
| HHW | Hand Weights 12.5kg |
| HHW20 | Hand Weights 20kg |
| HHW25 | Hand Weights 25kg |
| HHWB | Hand Weight Transport Trolley |
| HHWT | Hand Weight Basket |



INTRINSICALLY SAFE LOAD MEASURE HOOK

For use in sensitive areas where digital load indicators are not allowed.

Ideal for use in the Chemical and Petrochemical Industries.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|----------------------------------|--------|
| HICMH5T | Intrinsic Safe Load Measure Hook | 5t |



TEST WEIGHTS & CRADLES

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|---|-------------------|---------|
| HSW1T | Test Weight Slabs | 1t |
| HSW2.5T | Test Weight Slabs | 2.5t |
| HTT | Test Weight Tray | Various |
| Various test weights trays & cradles available up to 600t | | |

Lifting Gear UK has test weights suitable for any testing of ballasting requirements up to 600t.


In addition, we have a range of cradles and trays available for dispatch. Our testing capabilities are up to 800t via either static or dynamic test motions.



COMPRESSION LOAD CELL

Ideal for performing Compression Tests, up to a maximum of 200t.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|-----------------------|--------|
| HCLC5T | Compression Load Cell | 5t |
| HCLC10T | Compression Load Cell | 10t |
| HCLC20T | Compression Load Cell | 20t |
| HCLC50T | Compression Load Cell | 50t |
| HCLC100T | Compression Load Cell | 100t |
| HCLC200T | Compression Load Cell | 200t |

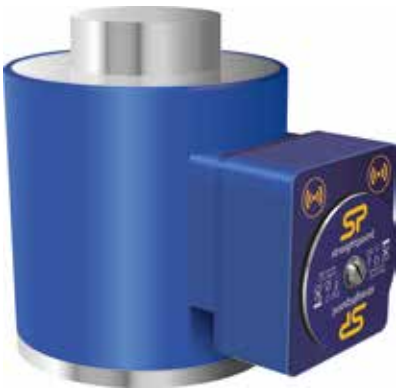

TENSION TESTER / EYE BOLT TESTER

Hydrajaws model 2000 medium duty fixing testers enable engineers to confirm the holding power of anchors in most construction materials, either for the purpose of establishing safe working loads or to validate the correct installation of existing fixings.

The tension load of up to 25kn is applied to the fixing mechanically and hydraulics are used to register the load through an accurate analogue gauge, making the tester very reliable.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|----------------|--------|
| HTT25KN | Tension Tester | 25KN |



HEIGHT & SAFETY EQUIPMENT



SAFETY HARNESS

A vital part of any working-at-height system. Harnesses consist of shoulder, thigh and sit straps.

Various attachment points on different styles of harnesses.

Available with front, rear and side attachment points.

| PRODUCT CODE | DESCRIPTION |
|--------------|------------------------|
| HSH | Safety Harness |
| HRSH | Rescue Safety Harness |
| HSH4PY | Safety Harness 4 Point |



FALL ARREST & RESTRAINT LANYARDS

Lanyards are available in fall arrest and restraint only options.

They can be supplied in rope or webbing, standard lengths are 1.5 or 2 metres, they terminate in scaff hooks or screwgate karabiners.

Can be supplied with either scaff hooks or screw gate karabiners.



| PRODUCT CODE | DESCRIPTION |
|--------------|---------------------|
| HFAL | Fall Arrest Lanyard |
| HRSL | Restraint Lanyard |
| HTL | Twintail Lanyard |



IS YOUR SAFETY GEAR COMPLIANT?

ALL HARNESSES, LANYARDS AND ANCHOR SLINGS NEED TO BE INSPECTED EVERY 6 MONTHS.

Our inspection team at Lifting Gear UK can service any piece of equipment, as required under LOLER standards.

INERTIA REELS - RETRACTABLE & RETRIEVABLE

A fall arrest device with a self retractable cable, available in fully automatic self retracting or for confined space entry retrievable inertia reels.

Speak to one of our trained representatives to help with your requirements.

| PRODUCT CODE | CABLE LENGTH |
|--------------|------------------------------|
| HIR3M | 3m |
| HIR6M | 6m |
| HIR8M | 8m |
| HIR10M | 10m |
| HIR12M | 12m |
| HIR15M | 15m |
| HIR20M | 20m |
| HIR36M | 36m |
| HIRR15M | Retrievable Inertia Reel 15M |
| HMB | Mini Block (2.25m) |

DID YOU KNOW?

INERTIA REELS NEED TO BE INSPECTED EVERY 6 MONTHS AND SERVICED EVERY 12 MONTHS.

Our inspection team at Lifting Gear UK can service any piece of equipment, as required under LOLER standards.



RETRACTABLE



MINI BLOCK



RETRIEVABLE

ROOF MAN ANCHOR

Portable deadweight Roof Man Anchor device.

Ideal for Fall Protection / Restraint when working on flat or short pitched roofs up to 15 degrees where there is no suitable anchor point. Designed to aid the user where handrails are not available.



- 12 WEIGHTS INCLUDED, 18.5KG EACH
- SPECIAL RUBBER BASE FOR EXTRA GRIP
- CHASSIS MADE FROM FIRE ZINC GALVANISED STEEL
- SUITABLE FOR ONE PERSON ONLY

| PRODUCT CODE | DESCRIPTION |
|--------------|-----------------|
| HRMA | Roof Man Anchor |

TRIPOD AND WINCH (MANRIDING ONLY)

Lightweight portable rescue system for use within confined spaces.
Use with rescue safety harnesses.

| PRODUCT CODE | DESCRIPTION |
|--------------|-----------------------|
| HFAT | Fall Arrest Tripod |
| HFATWY | Retrievable Winch 20m |
| HRSH0001 | Rescue Harness |



HORIZONTAL TEMPORARY LIFELINE

Portable, horizontal lifeline suitable for single man use.

Gives horizontal movement and fall protection where there is no permanent installation for fall protection.

Don't forget to order your harness and lanyard.

| PRODUCT CODE | DESCRIPTION |
|--------------|-----------------------------------|
| HTLL10M | Horizontal Temporary Lifeline 10m |
| HTLL18M | Horizontal Temporary Lifeline 18m |
| HTLL20M | Horizontal Temporary Lifeline 20m |
| HTLL30M | Horizontal Temporary Lifeline 30m |



TRAILER LOADING SYSTEM

Designed for easy installation and removal, temporary horizontal lifeline system manufactured for a wide range of industries; construction, roofing, warehouse structures etc.

The system is tensioned with a ratchet, for restraint purposes the horizontal safety line can be used in conjunction with the fixed length restraint lanyards & fall arrest lanyards. It can also be used as anchorage with standard rope safety lines.

| PRODUCT CODE | DESCRIPTION | MAX. WORKING HEIGHT |
|--------------|------------------------|---------------------|
| HCLS | Trailer Loading System | 5m |



- ▲ AVAILABLE IN TO A MAX LENGTH OF 20 METRES
- ▲ AVAILABLE WITH LOOPS OR HOOKS AT EACH END
- ▲ SUPPLIED IN A ROBUST BAG



AERIAL WORKING PLATFORM

The COMBISAFE® Loading System is designed to prevent falls from height during the loading and unloading of equipment from the top of a flatbed delivery lorry/trailer in a safe manner.

| PRODUCT CODE | DESCRIPTION | PLATFORM HEIGHT | S.W.L. |
|--------------|-------------------------|-----------------|--------|
| HAWPPL | Aerial Working Platform | 11.1m | 159kg |

- ▲ OPERATIVE HAS AN ANCHOR POINT 5.9 M ABOVE GROUND LEVEL
- ▲ ONLY 1500KG OF BALLAST NOW NEEDED SO FASTER TO INSTALL AND LIGHTER TO RELOCATE IF NEEDED ONCE FULLY ASSEMBLED
- ▲ BASE HAS NO PINS OR BOLTS ENABLING QUICK AND SIMPLE ASSEMBLY / DISASSEMBLY
- ▲ DISMANTLES INTO EASILY STACKABLE UNITS
- ▲ ALLOWING SIMPLER TRANSPORT AND LESS STORAGE SPACE
- ▲ CAN BE USED ON SITE OR IN A LOADING YARD UNIT CAN BE LEVELLED USING THE ADJUSTABLE/ REPLACEABLE FEET (UP TO 5°)
- ▲ BALLAST MUST WEIGH NO LESS THAN 1500KG WHEN IN USE



COUNTERBALANCE DAVIT ARM AND BARREL MOUNT DAVIT ARM SYSTEM

The davit arm system is ideal for confined space entry and emergency rescue applications and can accommodate a variety of winches and fall arrest devices.

Counterweight systems are perfect for applications where there is no fixed base such as permanent socket and for service engineers that work on remote locations where portability and versatility are key.

| PRODUCT CODE | DESCRIPTION | S.W.L. |
|--------------|----------------------------------|--------|
| HCBDS | Counterbalance Davit Arm System | 140kg |
| HBMDS | Barrel Mount Davit Arm System | 140kg |
| HDPDW | Dual Purpose Davit Winch | 140kg |
| HDPRW | Dual Purpose Recovery Winch | 140kg |
| HRFADW | Recovery Fall Arrest Davit Winch | 140kg |





The adjustable barrel mount sleeve davit makes it possible to provide a safe access solution where this would previously have been very difficult.

This can also be used to form a lifting point onto a trench sheet up-stand. If used with very light duty sheets such as M6, then a wooden sleeper should be used behind the sheets so as to increase the allowable bending moment.

- ▲ FREE-STANDING NON-PENETRATING BASE DOES NOT ATTACH TO THE WORKING SURFACE, REDUCING POSSIBILITY OF DAMAGE
- ▲ WEIGHTS PROVIDE THE REQUIRED ANCHORAGE STRENGTH (NOT INCLUDED AS STANDARD) - VARIABLES SUCH AS DAVIT OFFSET WILL DICTATE NUMBER OF WEIGHTS
- ▲ ADJUSTABLE LEGS ALLOW SYSTEM TO BE POSITIONED NEXT TO TALLER CONFINED SPACE ENTRY AREAS SUCH AS TANKS
- ▲ A RACK WITH BASE AND TOP PLATES, CENTRE POSTS AND SCREW-DOWN KNOBS SECURES THE WEIGHTS TO THE BASE FOR ABSOLUTE SECURITY
- ▲ SELF RETRACTING LIFELINE (SRL), INERTIA REEL, MANRIDING WINCH, AND BRACKETS SUPPLIED WITH KIT

TESTING EQUIPMENT

When it comes to lifting and handling, testing is all important. We have the test equipment you need available for immediate hire:

TEST WEIGHT TRAYS

TEST WEIGHTS

CHEESE WEIGHTS / POLES

HAND WEIGHTS AND TROLLEYS

SLAB WEIGHTS

| PRODUCT CODE | DESCRIPTION | MAX. WORKING HEIGHT |
|--------------|------------------------------|---------------------|
| HHW | Hand Weight 12.5kg | 12.5kg |
| HHW20 | Hand Weight 20kg | 20kg |
| HHW25 | Hand Weight 25kg | 25kg |
| HHWB | Hand Weight Trolley | 100kg |
| HHWC | Hand Weight Cage For Trolley | 100kg |
| HHWT | Hand Weight Basket | 600kg |
| HSW275KG | Slab Weight | 275kg |
| HSW500KG | Slab Weight | 500kg |
| HSW1T | Slab Weight | 1t |
| HSW2T | Slab Weight | 2t |
| HSW2.5T | Slab Weight | 2.5t |
| HSW4T | Slab Weight | 4t |
| HSW5.2T | Slab Weight | 5.2t |
| HCW100KG | Cheese Weight | 100kg |
| HCW200KG | Cheese Weight | 200kg |
| HCW250KG | Cheese Weight | 250kg |
| HCW500KG | Cheese Weight | 500kg |
| HCW1T | Cheese Weight | 1t |
| HCW2T | Cheese Weight | 2t |
| HCW2.5T | Cheese Weight | 2.5t |
| HTT15T | Test Weight Tray | 15t |
| HTT63T | Test Weight Tray | 63t |
| HTT160T | Test Weight Tray | 160t |



CRANE MATS & PLATES



CRANE MATS & PLATES

| PRODUCT CODE | DESCRIPTION | DIMENSIONS |
|--|-----------------|-----------------------|
| HSM1.75M | Steel Crane Mat | 1.75m x 1.75m x 120mm |
| HSM2.5M | Steel Crane Mat | 2.5m x 1.2m x 120mm |
| HSM2.8M | Steel Crane Mat | 2.8m x 1.2m x 170mm |
| HSM3.05M | Steel Crane Mat | 3.05m x 2.55m x 180mm |
| HSM5.5M | Steel Crane Mat | 5.5m x 2.8m x 305mm |
| HSM11M | Steel Crane Mat | 11m x 2.8m x 305mm |
| Temporary bridge systems can be created using large mats. Please call for details. | | |

Steel crane mats can be used where ground loading pressures need to be reduced.

They are available in a range of sizes.

Lifting Gear UK has access to the largest selection of steel crane mats in the UK.



HARDWOOD CRANE MATS (EKKI MATS)

Our Hardwood Crane Mats can be used in situations where ground conditions are poor to provide additional support.

They can also be used to make temporary roads across challenging terrain for heavy vehicles.

| PRODUCT CODE | DESCRIPTION | DIMENSIONS |
|--------------|--------------------|---------------------|
| HHWM1.5M | Hardwood Crane Mat | 1.5m x 1.5m x 150mm |
| HHWM5MX70M | Hardwood Crane Mat | 5m x 1m x 70mm |
| HHWM5MX1M | Hardwood Crane Mat | 5m x 1m x 150mm |
| HHWM6MX1M | Hardwood Crane Mat | 6m x 1m x 200mm |
| HHWM2M | Hardwood Crane Mat | 2m x 1.2m x 100mm |
| HHWM3M70MM | Hardwood Crane Mat | 3m x 1.2m x 70mm |
| HHWM3M | Hardwood Crane Mat | 3m x 1.2m x 150mm |



RAILWAY SLEEPERS

Used for building up under outriggers for levelling or alternatively they can be used as temporary supports for various engineering & construction applications.

| PRODUCT CODE | DESCRIPTION | DIMENSIONS |
|--------------|-----------------|------------------------|
| HRSP2.5M | Railway Sleeper | 2500mm x 225mm x 150mm |



ROAD PLATES - STEEL

Ideal for placing over trenches and holes to allow personnel and vehicles to pass over.

Various sizes available.

| PRODUCT CODE | DESCRIPTION | DIMENSIONS |
|--------------|---------------------|----------------------|
| HRPL | Road Plates - Steel | 2.4m x 1.25m x 19mm |
| HRPL1.25 | Road Plates - Steel | 1.25m x 1.25m x 19mm |
| HRPLX25 | Road Plates - Steel | 2.4m x 1.25m x 25mm |
| HRPL1.25.25 | Road Plates - Steel | 1.25m x 1.25m x 25mm |



ETHOFOAM SURFACE PROTECTION SHEETS

Ethofoam mats are an ideal alternative to sand for placing under crane outrigger mats to protect block paving, cobbles or other easily damaged surfaces.

| PRODUCT CODE | DESCRIPTION | DIMENSIONS |
|--------------|-------------|---------------------|
| HE5PS | Ethofoam | 2.75m x 0.6m x 50mm |

NYLON CRANE MATS

These crane mats are designed to be manually handled and are ideal for reduction of ground loadings for cranes and HIAB's.

| PRODUCT CODE | DESCRIPTION | DIMENSIONS |
|--------------|-------------------------|----------------------|
| HNMO.75M | Nylon Crane Mat | 0.75m x 0.75m x 40mm |
| HNM1M | Nylon Crane Mat | 1m x 1m x 50mm |
| HNM1.2M | Nylon Crane Mat | 1.2m x 1m x 60mm |
| HNBF1.2M | Nylon Crane Mat (Round) | 1.2m x 80mm |
| HNBF1M | Nylon Crane Mat (Round) | 1m x 60mm |
| HNBF760 | Nylon Crane Mat (Round) | 760mm x 40mm |
| HNBF1M80MM | Nylon Crane Mat | 1m x 1m x 80mm |



- MADE FROM EXTREMELY HIGH QUALITY, HEAVY DUTY UHMW POLYETHYLENE
- OFFERS PROTECTION AGAINST WATER, CORROSION AND SPLINTERING
- LIGHT AND EASY TO HANDLE AS WELL
- RETAINS ITS SHAPE UNDER EXTREME VERTICAL PRESSURE, DUE TO THE IN-BUILT MEMORY TECHNOLOGY MAKING THEM VIRTUALLY INDESTRUCTIBLE



STEELWISE
FABRICATION & ENGINEERING

VERSATILE & BESPOKE

In the unlikely event we can't supply the lifting equipment you need, we'll build it, using our very own fabrication division, Steelwise.

CALL **01772 699888**

www.liftingprojects.com

 **SOLIDWORKS**



LIFTING PROJECTS UK
PLANNING | EQUIPMENT | PROJECT

TOTAL PROJECT MANAGEMENT

With load capacities up to several hundred tonnes,
Lifting Projects UK is ideally equipped to tackle any job.

CALL **01772 699888**

www.liftingprojects.com

| | | | | | |
|------------------------------------|-----|---|-----|-------------------------------------|-----|
| A | | G | | P | |
| ADJUSTABLE RAIL LIFTING CLAMP | 48 | GAS BOTTLE LIFTING CAGE | 89 | PACKAWAY FLOOR CRANE | 64 |
| AERIAL WORKING PLATFORM | 171 | GEARED CONCRETE SKIP | 94 | PALANBOX HOIST | 76 |
| AERO GO JACKS | 155 | GEARED GIRDER / BEAM TROLLEY | 50 | PALLET TRUCKS | 124 |
| AIR HOIST | 39 | GENIE GAS POWERED 'SUPERHOIST' | 72 | PANEL LIFTER | 73 |
| AIR SKATES | 156 | GIRDER / BEAM CLAMP | 48 | PANEL LIFTING BEAM | 25 |
| AIR WINCHES | 44 | GIRDER / BEAM TROLLEY | 49 | PILING SHACKLE | 16 |
| ALL TERRAIN PALLET TRUCK | 132 | GOODS CARRYING CASE | 86 | PIPE BOGEY | 135 |
| ALLOY BOW SHACKLES | 15 | H | | PIPE CRADLE | 69 |
| ALUMINIUM / STEEL GANTRY | 60 | HAND WEIGHTS | 160 | PIPE LAYING HOOKS | 104 |
| ALUMINIUM JACKS | 143 | HAND WEIGHTS & CRADLES | 174 | PIPE LIFTING HOOKS | 53 |
| B | | HAND WEIGHTS BASKET | 160 | PIPE LIFTING HOOKS | 105 |
| BARREL MOUNT DAVIT ARM SYSTEM | 172 | HARDWOOD CRANE MATS | 177 | POWER PUSHER | 131 |
| BEAM LIFTER | 67 | HEAVY DUTY TOWABLE SITE BOGEY | 121 | POWERED STACKER TRUCK | 130 |
| BLOCK GRABS | 84 | HIGH LIFT PALLET TRUCKS | 127 | PREFABRICATED CONCRETE GRAB | 112 |
| BLOCK PAVING EXTRACTOR | 103 | HODDI HOIST | 80 | PRESSURE GAUGE | 145 |
| BOARD / PALLET FORKS | 89 | HORIZONTAL PLATE CLAMPS | 54 | PULL LIFT | 40 |
| BOARD TROLLEY | 133 | HORIZONTAL TEMPORARY LIFELINE | 169 | R | |
| BOSUN'S CHAIR | 92 | HOSE EXTENSION | 145 | RAIL LIFTING CLAMP | 58 |
| BOTTLE JACKS | 146 | HYDRAULIC CYLINDERS | 142 | RAILWAY SLEEPERS | 178 |
| BUILDER'S GANTRY HOIST | 78 | HYDRAULIC HAND PUMP | 145 | RAPIDE PORTA-GANTRY | 70 |
| BUMPA HOIST | 79 | HYDRAULIC JACK | 145 | RATCHET CABIN JACKS / FARM JACKS | 155 |
| C | | HYDRAULIC MINI-LIFTER | 126 | RATCHET JACKS | 147 |
| CABLE DRUM SCREW JACKS | 153 | HYDRAULIC LIFTING / PULLING MACHINE | 41 | ROAD PLATES - STEEL | 179 |
| CABLE PULLING ROLLERS | 45 | HYDRAULIC PULLER KITS | 150 | ROLLER CROW BAR | 154 |
| CABLE PULLING WINCH / ROLLERS | 45 | HYDRAULIC TROLLEY JACK | 148 | ROOF MAN ANCHOR | 167 |
| CAGED BRICK FORKS | 90 | HYDRAULIC WEDGES - SEPARATING & LIFTING | 149 | S | |
| CAMLOCK LIFTING LUGS | 57 | I | | SACK TRUCK | 134 |
| CAR LIFTING NET | 91 | INERTIA REELS - RETRACTABLE & RETRIEVABLE | 166 | SAFETY HARNESS | 164 |
| CARGO NETS | 97 | INTRINSICALLY SAFE LOAD MEASURE HOOK | 160 | SCAFFOLD JOB HOIST | 77 |
| CHAIN SLING MULTI-LEG | 13 | K | | SCAFFOLD LIFTING CAGE | 87 |
| CHAIN SLINGS | 12 | KERB STONE CLAMP | 113 | SCAFFOLD PULLEY WHEEL | 77 |
| CHAINBLOCKS | 37 | KERB STONE LIFTING HANDLES | 101 | SCISSOR LIFT TABLE | 138 |
| CHAINHOISTS | 36 | L | | SELF-DISCHARGE BOAT SKIP | 95 |
| CHEESE WEIGHTS / POLES | 174 | LEVER HOIST | 40 | SELF-LEVELLING CRANE / PALLET FORKS | 91 |
| CIRCULAR MUCK TIPPING SKIP | 96 | LEVER HOIST / PULL LIFT | 40 | SEPARATING WEDGE | 149 |
| COLUMN SKIP | 94 | LEVERED CONCRETE SKIP | 94 | SHEAR LEGS | 62 |
| COMPACT GENIE LIFT | 66 | LIFTING / PULLING MACHINE | 41 | SHEAVE / SNATCH BLOCKS | 42 |
| COMPRESSION LOAD CELL | 162 | LIFTING BOOM | 69 | SINGLE POINT LIFTING BEAM | 27 |
| CONCRETE HIGHWAY DIVIDER CLAMP | 114 | LIFTING MAGNET | 52 | SITE STRETCHER CAGE | 88 |
| CONCRETE KERB GRAB | 112 | LIFTING PINS | 109 | SKIP LIFTING CRADLE | 92 |
| CONCRETE LIFTING CLUTCH | 17 | LIFTING UNDER BEAM | 30 | SKOOTS FURNITURE MOVER | 137 |
| CONCRETE SKIPS | 94 | LIFTING WEDGE | 149 | SLAB EXTRACTOR | 103 |
| CONTAINER LIFTING FRAME | 33 | LIGHTWEIGHT ALUMINIUM JACKS | 143 | SLAB WEIGHTS | 174 |
| COUNTER BALANCE MATERIAL LIFT | 63 | LOAD BAR | 153 | STAIR CLIMBER | 136 |
| COUNTERBALANCE DAVIT ARM SYSTEM | 172 | LOAD PLATE | 69 | STEEL CRANE MATS | 175 |
| COUNTERBALANCE FLOOR CRANE | 65 | LONG NOSE PALLET TRUCKS | 125 | STEEL MACHINE SKATES | 152 |
| COUNTERBALANCE LIFTING BEAM | 31 | LOW HEADROOM TEST WEIGHTS | 159 | STEEL TOE JACKS | 144 |
| CRANE MATS | 175 | M | | STEERABLE NYLON LOAD MOVING SKATES | 151 |
| CRUCIFORM LIFTING BEAM | 26 | MACHINE LIFTING TRAYS | 34 | STONE VACUUM MAGNET | 99 |
| CYLINDER ACCESSORIES | 145 | MAN RIDING BASKET | 85 | STRETCHER | 88 |
| D | | MANHOLE COVER LIFTER | 107 | T | |
| DEE SHACKLES | 14 | MANHOLE RING CLAMP | 110 | TENSION TESTER | 162 |
| DIGITAL LOAD INDICATORS | 158 | MANHOLE RING LIFTER | 111 | TEST WEIGHT TRAYS | 174 |
| DRUM LIFTER | 55 | MANIFOLD 2 WAY / 4 WAY | 145 | TEST WEIGHTS & CRADLES | 161 |
| DYNEEMA SLING | 21 | MANRIDING / GOODS LIFTING TRIPOD | 62 | TEST WEIGHTS & CRADLES | 174 |
| E | | MATERIAL CONVEYORS | 81 | TESTING EQUIPMENT | 174 |
| EKKI MATS | 177 | MATERIAL LIFT - GENIE SUPERLIFT ADVANTAGE | 68 | TIRAK WIRE ROPE HOIST / WINCH | 46 |
| ELECTRIC CHAINHOISTS | 38 | MATERIAL LIFT ACCESSORIES | 69 | TRAILER LOADING SYSTEM | 170 |
| ELECTRIC POWERED PALLET TRUCKS | 129 | MATERIAL LIFT ROUST-A-BOUT | 74 | TRIPOD AND WINCH | 168 |
| ELECTRIC PUMP | 145 | MEASURE HOOK | 160 | TURNTABLE SITE TRUCK | 139 |
| ETHOFOAM SURFACE PROTECTION SHEETS | 179 | MECHANICAL BOULDER / ROCK GRAB | 98 | U | |
| EXTENSION FORKS | 69 | MINIFOR HOIST | 43 | UNIVERSAL LIFTING HANDLES | 102 |
| EYE BOLT TESTER | 162 | MINIFOR HOIST / WINCH | 43 | V | |
| F | | MINIFOR WINCH | 43 | VACUUM GLASS LIFTER | 82 |
| FALL ARREST & RESTRAINT LANYARDS | 165 | MODULAR LIFTING FRAME | 32 | VACUUM KERB & STONE LAYER | 106 |
| FIXED SINGLE POINT LIFTING BEAM | 29 | MODULAR SPREADER BEAM | 24 | VACUUM KERB & STONE LAYER | 108 |
| FLAG LAYING VACUUM HANDLES | 100 | MULTI POINT LIFTING BEAM | 28 | VERTICAL PLATE CLAMPS | 56 |
| FORKLIFT HOOK ATTACHMENT | 117 | N | | W | |
| FORKLIFT MAN BASKET | 118 | NIKO SCAFFOLDING RUNWAY SYSTEM | 82 | WEBBING SLING | 18 |
| FORKLIFT TELESCOPIC JIB | 116 | NYLON CRANE MATS | 180 | WEIGHING PALLET TRUCK | 128 |
| FORKLIFT TRUCK EXTENSION FORKS | 120 | | | WIRE ROPE SLING | 20 |
| FORKLIFT TRUCK TIPPING SKIP | 119 | | | | |

OPEN YOUR ACCOUNT TODAY

New Account Application - Limited Company

Company Trading Name

Registered Number

Invoice Address

Trade / Buyer
Contact Information

Name

Phone Number

Email Address

Mobile Number

Accounts
Contact Information

Name

Phone Number

Email Address

Fax Number

Website Information

VAT Registration Number

Requested Credit Limit

This Account Application Form is issued subject to the standard trading terms and conditions of Lifting Gear UK Limited and Lifting Projects UK Limited, available via www.lg-uk.com or www.liftingprojects.com or otherwise on request ('the Terms') where all defined terms referred to in this form take the meaning ascribed to them in those Terms.

Any Contracts for the supply of Goods and/or Services shall be made in accordance with clause 2 of the Terms under which Orders are raised. All invoices shall be sent to the accounts contact email address set out above and payment terms in relation to which are 30 days from the date of the invoice as set out in clause 4.6 of the Terms.

By completing and submitting this form, you warrant that you are personally authorised to contractually bind the Customer and hereby acknowledge that you have read, understood and agree to the Terms in all respects with your special attention having been drawn to clause 3, 6 - 7, 27 - 28 and 30 - 31 of the Terms.

Signed

Date

Position

Photocopy and email your application form to: accounts@lg-uk.com.

Please note: All hire, sales and services are offered subject to our terms & conditions, a copy of which is available on request.



LIFTING GEAR UK
HIRE | SALES | SERVICE

LOLER INSPECTION

Thorough examination is a critical part of the lifting industry and we know how to do it to professional LOLER standards.

CALL **0330 332 2650**

www.lg-uk.com



BRANCHES THROUGHOUT THE UK

Hire or buy equipment at any one of our branches.

With the support of 11 Lifting Gear UK centres, each run by our lifting and handling experts, we're here to lighten your load no matter who you are or where you're based.



You're in safe hands



PRESTON

Unit D3, Leyland Business Park,
Centurion Way, Leyland, PR25 3GR

T: 01772 699 880

F: 01772 623 852

E: preston@lg-uk.com

MANCHESTER

Units 6 & 7, Guinness Road, Trafford Park,
Manchester, M17 1SD

T: 0161 728 5656

F: 0161 728 5312

E: manchester@lg-uk.com

LIVERPOOL

Unit 4B, Canada Dock Exchange,
Derby Road, Liverpool, L20 8AF

T: 0151 203 1900

F: 0151 203 1085

E: liverpool@lg-uk.com

WEST LONDON

Unit 30 Telford Way, Westway Industrial
Estate, Acton, London, W3 7XS

T: 0208 150 8885

F: 0208 997 7694

E: westlondon@lg-uk.com

EAST LONDON

74 Roding Road, London Industrial Park,
Beckton, E6 6LS

T: 0207 474 1111

F: 0207 474 6060

E: eastlondon@lg-uk.com

GLASGOW

Unit 1 Houston Place, Kingston Bridge
Trading Estate, Glasgow, G5 8SG

T: 0141 290 0901

F: 0141 429 2537

E: glasgow@lg-uk.com

BIRMINGHAM

Unit 24, Coneygre Industrial Estate,
Birmingham New Road, Tipton,
Birmingham, DY4 8XP

T: 0121 522 2255

F: 0121 557 1527

E: birmingham@lg-uk.com

MIDDLESBROUGH

5a Bowes Road, Riverside Park
Middlesbrough, TS2 1LU

T: 01642 791 792

F: 01642 459 680

E: middlesbrough@lg-uk.com

LEEDS

Unit B, Turnkey Park, Royds Lane,
Leeds, LS12 6AD

T: 0113 208 3339

F: 0113 318 6797

E: leeds@lg-uk.com

BRIDGWATER

Unit ZZ3, Wylds Road, Bridgwater,
Somerset, TA6 4BH

T: 01278 455 556

F: 01278 426 730

E: bridgwater@lg-uk.com

HINKLEY POINT (HOT DESK)

c/o Somerset Energy Innovation Centre,
Woodlands Business Park, Bristol Road,
Bridgwater, Somerset, TA6 4FJ

T: 0117 403 4741

E: hinkleypoint@lg-uk.com

LIFTING PROJECTS UK

Unit D3, Leyland Business Park,
Centurion Way, Leyland, PR25 3GR

T: 01772 699 888

F: 01772 458 162

E: liftingprojects@lg-uk.com

HEAD OFFICE & ACCOUNTS

Unit 1D, Maple Court, Maple View,
White Moss Business Park, Skelmersdale,
WN8 9TW

T: 01695 725 550

F: 01695 725 844

E: accounts@lg-uk.com

- ▲ HIRE
- ▲ SALES
- ▲ REPAIRS
- ▲ INSPECTION
- ▲ TESTING



CALL: 0330 332 2650
EMAIL: info@lg-uk.com

www.lg-uk.com