




LIFTING GEAR UK
HIRE | SALES | SERVICE

SWL 136 KG (One Man)

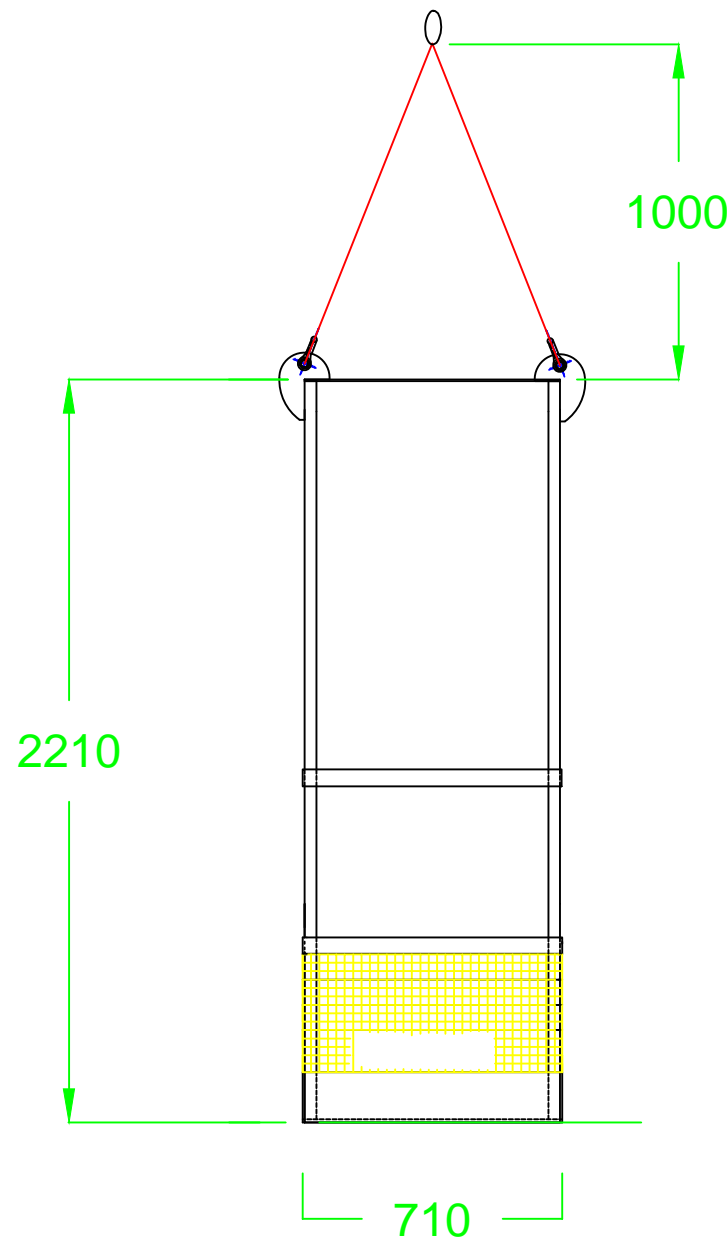

Circular 1 man Basket
Height - 2210 mm
Width - 710 mm
Net Weight - 113 kgs
SWL - 136 kgs



REV	DATE	AMMENDMENT
A	09.10.2014	Original

This Drawing & the information contained therein is the property of Lifting Gear UK Ltd & is lent on the condition that it will not be copied or disclosed directly or indirectly nor used for any purpose other than that which it is specifically furnished. The information contained within this drawing is for reference purposes only and is without charge, liability or responsibility.

Lifting Gear UK

HEAD OFFICE
UNIT 03 CENTURION BUSINESS PARK
CENTURIAN WAY, LEYLAND
LANCASHIRE, PR25 3GR

Tel: 01772 699880
Fax: 01772 623852

CLIENT: LG-UK Ltd	DATE: 09-10-2014
SITE ADDRESS: Leyland	DRAWN: A. Clark
JOB DESCRIPTION: Manufacture 770mm Diameter round manbasket	SCALE: NTS
CLIENTS DRAWING REFERENCE No. 0	APPROVED: Original size A3



Specification sheet

1073 – Heavy Duty Access Cage



The 1073HD is the contractor's choice for easy efficient and safe high level access. Manufactured with safety in mind the 1073 boasts, overhead protection from falling objects, 1m high solid wall surround to ensure items cannot be kick over the edge as well as inward opening door, overhead harness point, internal hand rail, close mesh to rear and double heel pin for fork lift use. It is also supplied with a large working tray to the front. This unit can be used with either Crane or Fork lift making it a universal piece of site equipment

Product Specification

Item Code	Load Capacity (KG)	*Overall Length (MM)	Platform Length (MM)	Height (MM)	Width (MM)	Weight (Kg)
1073HD	250	1360	990	2250	990	190

*Including fork pockets to rear and tool box to front



LIFTING GEAR UK

HIRE | SALES | SERVICE

4 PERSON ACCESS CAGE



The 4 Man Cage is built primarily with safety in mind, the cage conforms fully to BSEN 14502 and PM28. This cage has solid walled sides to half height and close mesh to the rear to prevent accidental injury but maintain visibility. The cage also benefits from internal overhead harness points.

Capacity	Width	Length	Height	SWL
4 Man	1625mm	2150mm	2185mm	660Kg