


# Steel Wire Rope Ropetex S14


## Product information



General use

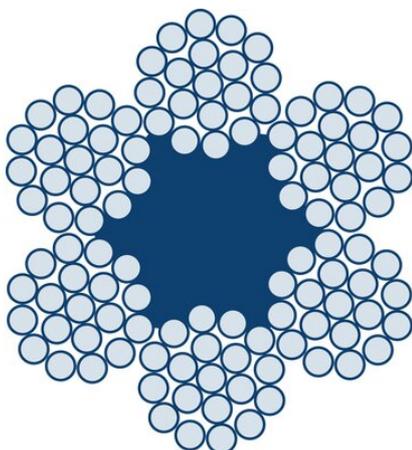

Overhead cranes



Slings



## ROPETEX



Ropetex S14 is a popular choice of steel wire rope in diameters from 3 to 12 mm. Ropetex S14 is equipped with a Fiber Core (FC), which makes the rope very flexible with reasonable strength.

Ropetex S14 can be used for applications where the rope runs over sheaves and pulleys. Also for cranes with low heights, when rotation resistant rope is not needed.

Ropetex S33 may be a better choice because it is equipped with a Wire Strand Core (WSC) which gives it higher strength and more resistance to crushing.

### Typical applications:

- Garage doors
- Industrial doors
- Lifting applications
- Slings

### Alternatives:

- Ropetex S33 is the same rope but with a Wire Strand Core instead of a Fibre Core, offering a higher strength but slightly less flexibility;
- Ropetex S16 offers comparable features as S14 but in diameter range 8-38 mm [... Read more](#)

**Rope construction:** 6x19M-FC

**Marking:** According to standard

**Temperature range:** -40°C up to +100°C

**Standard:** EN 12385-4, AS 3569

**Fill factor:** 0,45

**RCN:** 04

## Steel Wire Rope Ropetex S14

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
101100304250050	3	1,770	Galvanized	sZ	4.9	3.21	Dry	3.1
101100304270050	3	1,960	Galvanized	sZ	5.42	3.21	Dry	3.1
101100404250050	4	1,770	Galvanized	sZ	8.7	5.71	Dry	5.5
101100404270050	4	1,960	Galvanized	sZ	9.63	5.71	Dry	5.5
101100504250050	5	1,770	Galvanized	sZ	13.6	8.93	Dry	8.7
101100504270050	5	1,960	Galvanized	sZ	15	8.93	Dry	8.7
101100604250050	6	1,770	Galvanized	sZ	19.6	12.9	Dry	13
101100604270050	6	1,960	Galvanized	sZ	21.7	12.9	Dry	13
101100704250050	7	1,770	Galvanized	sZ	26.6	17.5	Dry	17
101100704270050	7	1,960	Galvanized	sZ	29.5	17.5	Dry	17
101100804270050	8	1,960	Galvanized	sZ	38.5	22.8	Dry	22.1
101101004270050	10	1,960	Galvanized	sZ	60.2	35.7	Dry	34.6
101101204270050	12	1,960	Galvanized	sZ	86.6	51.4	Dry	49.8
101101304270050	13	1,960	Galvanized	sZ	102	60.3	Dry	58.5
101101604270050	16	1,960	Galvanized	sZ	154	91.4	Dry	88.6
101101804270050	18	1,960	Galvanized	sZ	195	115.7	Dry	112.1
101102004270050	20	1,960	Galvanized	sZ	241	142.8	Dry	138.4