



**LIFTING GEAR UK**  
HIRE | SALES | SERVICE


## TXL Range Manual Scissor Lift Table

Our TXL range of scissor lift tables consist of medium to heavy duty single and double manual lift tables which are easy to operate. The tables are used for a variety of work functions and are therefore versatile lifting aids within industrial, workshop, warehouse and other environments. We can offer galvanized and stainless steel versions. Different table tops (e.g. rotating, with rollers, ball bearings) can be fitted to most tables and we can also design and build completely bespoke versions to match your requirements.



## FEATURES & BENEFITS

- Capacity range from 150 kg to 1500kg
- Heavy duty design
- Great stability & manoeuvrability
- Foot pump to lift platform
- Hand lever to release/lower platform
- Can be used safely at any height
- Special bespoke designs available
- Both swivel wheels are fitted with a total stop brakes as standard

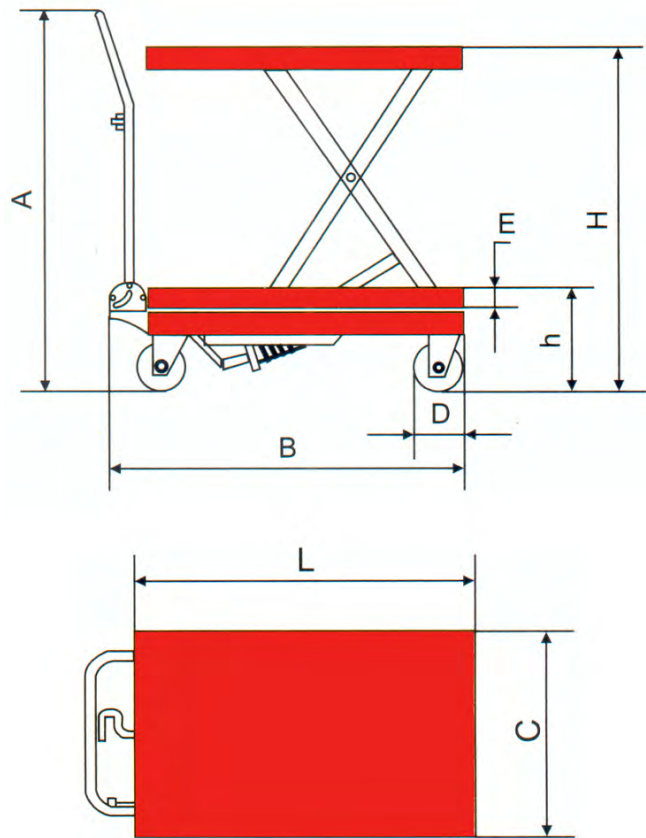

## Technical Specifications

| Model                          |    | TXL150    | TXL200     | TXL300    | TXL500    | TXL500L    | TXL800     | TXL1000    | TXL1500    |
|--------------------------------|----|-----------|------------|-----------|-----------|------------|------------|------------|------------|
| Lift                           |    | Manual    | Manual     | Manual    | Manual    | Manual     | Manual     | Manual     | Manual     |
| Capacity                       | kg | 150       | 200        | 300       | 500       | 500        | 800        | 1000       | 1500       |
| Platform size (C x L)          | mm | 450 x 700 | 500 x 1000 | 500 x 855 | 500 x 855 | 800 x 1600 | 510 x 1000 | 515 x 1015 | 610 x 1220 |
| Lift height (h - H)            | mm | 225 - 740 | 340 - 1000 | 340 - 915 | 340 - 910 | 310 - 910  | 420 - 1000 | 380 - 1010 | 420 - 1010 |
| Pump strokes to max.height     | #  | 23        | 18         | 25        | 48        | 42         | 48         | 50         | 52         |
| Handle height (A)              | mm | 935       | 1055       | 970       | 970       | 970        | 970        | 970        | 970        |
| Wheel diameter (D)             | mm | 100       | 200        | 125       | 125       | 125        | 150        | 150        | 150        |
| Overall length incl. pedal (B) | mm | 930       | 1120       | 1080      | 1100      | 1820       | 1320       | 1320       | 1570       |
| Weight                         | kg | 43        | 70         | 75        | 79        | 134        | 115        | 121        | 142        |

Note: 720mm  
O/A width

| Model                          |    | TXL150D  | TXL350D    | TXL680D    | TXL800D    |
|--------------------------------|----|----------|------------|------------|------------|
| Lift                           |    | Manual   | Manual     | Manual     | Manual     |
| Capacity                       | kg | 150      | 350        | 680        | 800        |
| Platform size (C x L)          | mm | 450x700  | 500 x 910  | 610x1210   | 610 x 1220 |
| Lift height (h - H)            | mm | 310-1120 | 350 - 1300 | 475 - 1510 | 485 - 1500 |
| Pump strokes to max.height     | #  | 16/30    | 46         | 25 / 70    | 90         |
| Handle height (A)              | mm | 920      | 970        | 1020       | 970        |
| Wheel diameter (D)             | mm | 100      | 125        | 150        | 150        |
| Overall length incl. pedal (B) | mm | 930      | 1130       | 1490       | 1590       |
| Weight                         | kg | 47       | 103        | 176        | 181        |

All tables conform to:

BS-EN1570 (Safety Requirements for Lifting Tables)

BS EN 292 (Safety of Machinery – Basic Concepts Parts 1 and 2)